

# Hardware User Manual

**ISM-MT9M131 V1.0**

*...maximum performance at minimum space*

## Contact

Bluetechnix Mechatronische Systeme GmbH

Waidhausenstraße 3/19

A-1140 Vienna

AUSTRIA/EUROPE

[office@bluetechnix.at](mailto:office@bluetechnix.at)

<http://www.bluetechnix.com>

Document No.: 100-3202-1-1.1

Date: 2011-07-11

## Table of Contents

---

1	Introduction .....	6
1.1	Overview .....	6
1.2	Key Features .....	6
1.2.1	BLT-ISM-Connector .....	7
1.3	Applications.....	7
2	General Description .....	8
2.1	Functional Description .....	8
2.1.1	Powering .....	8
2.1.2	Signal Termination.....	9
2.2	Mechanical Outline.....	9
3	Specifications.....	11
3.1	Electrical Specifications.....	11
3.1.1	Operating Conditions .....	11
3.1.2	Maximum Ratings.....	11
3.1.3	ESD Sensitivity .....	11
4	Connector Description (BLT-ISM-Connector) .....	12
5	Support .....	13
5.1	General Support.....	13
5.2	Board Support Packages .....	13
5.3	Blackfin® Software Support .....	13
5.3.1	BLACKSheep® OS .....	13
5.3.2	LabVIEW .....	13
5.3.3	uClinux.....	13
5.4	i.MX Software Support .....	13
5.4.1	Linux .....	13
5.5	Blackfin® and i.MX Design Services .....	13
5.5.1	Upcoming Products and Software Releases .....	13
6	Ordering Information .....	14
6.1	Image Sensor Module.....	14
6.2	Related Products.....	14
6.3	Lens Holders and Optics.....	14
7	Dependability .....	15
7.1	MTBF.....	15
8	Product History .....	16
8.1	Version Information.....	16
8.2	Anomalies.....	16

9	Document Revision History .....	17
10	List of Abbreviations .....	18
A	List of Figures and Tables.....	19

© Bluetechnix Mechatronische Systeme GmbH 2011

All Rights Reserved.

The information herein is given to describe certain components and shall not be considered as a guarantee of characteristics.

Terms of delivery and rights of technical change reserved.

We hereby disclaim any warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Bluetechnix makes and you receive no warranties or conditions, express, implied, statutory or in any communication with you. Bluetechnix specifically disclaims any implied warranty of merchantability or fitness for a particular purpose.

Bluetechnix takes no liability for any damages and errors causing of the usage of this board. The user of this board is responsible by himself for the functionality of his application. He is allowed to use the board only if he has the qualification. More information is found in the General Terms and Conditions (AGB).

#### **Information**

For further information on technology, delivery terms and conditions and prices please contact Bluetechnix (<http://www.bluetechnix.com>).

#### **Warning**

Due to technical requirements components may contain dangerous substances.

## 1 Introduction

The ISM-MT9M131 integrates Aptina's MT9M131 image SoC (System-on-a-Chip), oscillator, voltage control and a M12 or CS mount lens-holder to support numerous M12 or CS-mount lenses at a size of 30 x 40mm.

### 1.1 Overview

The MT9M131 CMOS digital image sensor from Aptina has an active-pixel-array of 1280H x 1024V (1.3MP). It is an ultra low power, cost effective, progressive scan image sensor with a completely integrated camera system (SoC) which has superior lowlight performance. The sensor can be programmed via an I<sup>2</sup>C interface and offers some sophisticated camera functions such as auto exposure control, auto white balance (AWB), auto black reference (ABR), auto flicker avoidance, auto color saturation, auto defect identification and correction. The sensor is able to capture in continuous mode for videos or single frame mode for clear sharp images for both low light and normal scenes.

### 1.2 Key Features

Description	Value
<b>OPTICAL FORMAT</b>	1/3-inch (5:4)
<b>ACTIVE ARRAY</b>	1280H x 1024V (1.3MP)
<b>IMAGING AREA</b>	4.6mm(H) x 3.7mm(V)
<b>PIXEL SIZE</b>	3.6 x 3.6µm
<b>RESPONSIVITY</b>	1.0 V/lux-sec (550nm)
<b>SNR</b>	Max 44 dB
<b>MAX DYNAMIC RANGE</b>	71dB
<b>FRAME RATE</b>	15fps at 50 MHz (SXGA 1280 x 1024) 30fps at 50 MHz (VGA 640 x 480) 60fps at 50MHz (640 x 512)
<b>CHROMA</b>	RGB Bayer pattern
<b>SHUTTER TYPE</b>	ERS - Electronic Rolling Shutter
<b>DATA RATE</b>	27Mb/s
<b>INPUT CLOCK</b>	50MHz
<b>MASTER CLOCK</b>	50MHz
<b>ADC RESOLUTION</b>	10-bit, dual on-chip
<b>DATA FORMAT</b>	10 bit parallel
<b>SINGLE SUPPLY VOLTAGE</b>	2.5V to 3.1V
<b>POWER CONSUMPTION</b>	170mW SXGA at 15 fps (54 MHz EXTCLK) 90mW VGA at 30 fps (54 MHz EXTCLK)
<b>OPERATING TEMPERATURE</b>	-30°C to +70°C
<b>RoHS COMPLIANT</b>	Yes
<b>BLT-ISM-CONNECTOR</b>	Yes
<b>LENS HOLDER</b>	M12 or CS-mount objective lens holder
<b>CS-MOUNT COMPATIBLE</b>	Yes
<b>M12-MOUNT COMPATIBLE</b>	Yes
<b>SIZE</b>	30 x 40mm <sup>2</sup>

Table 1-1: Key features

### 1.2.1 BLT-ISM-Connector

The Bluetechnix Image-Sensor-Connector "BLT-ISM-Connector" is a Bluetechnix standardized interface with 30 pins, which allows easy connection of the Bluetechnix Image-Sensor-Modules to the development and extender boards from Bluetechnix.

Advantages of the BLT-ISM-Connector

- One interface for all Image-Sensor-Modules
- Flexible, camera is not fixed on the baseboard
- Single\* or dual power supply

The BLT-ISM-Connector interface description can be read in chapter 4.

\*Depends on user hardware.

## 1.3 Applications

- Security
- Biometrics
- Video conferencing
- Toys
- 802.11 wireless network cameras
- Power line modem cameras
- IP cameras
- uPNP AV, WiFi, UWB cameras
- Small office monitoring
- Home monitoring

## 2 General Description

The ISM-MT9M131 image sensor module features Aptina's MT9M131 image SoC. The on-board oscillator and power regulators for core and analog voltages make it easy to use the module for any embedded system hardware.

The module needs a single voltage supply between 2.5V and 3.1V. The I<sup>2</sup>C compatible configuration bus allows to configure the sensor IC, the 10 bit parallel interface transfers the data.

Some handshake lines are connected to the MT9M131 for power saving or capture triggering.

A 50MHz oscillator connected to the master clock of the image sensor, supplies the internal clock divider. An external clock input is not needed.

For detailed information about the image sensor please refer to the MT9M131 data sheet and reference manual available on the Aptina website (<http://www.aplina.com>).

To not constrain the developer in the various applications, the module is shipped without lens holder and optics. Bluetechnix though offers a M12 as well as a CS-Mount lens holder and some fitting optics. But also many 3<sup>rd</sup> party suppliers deliver matching accessories.

### 2.1 Functional Description

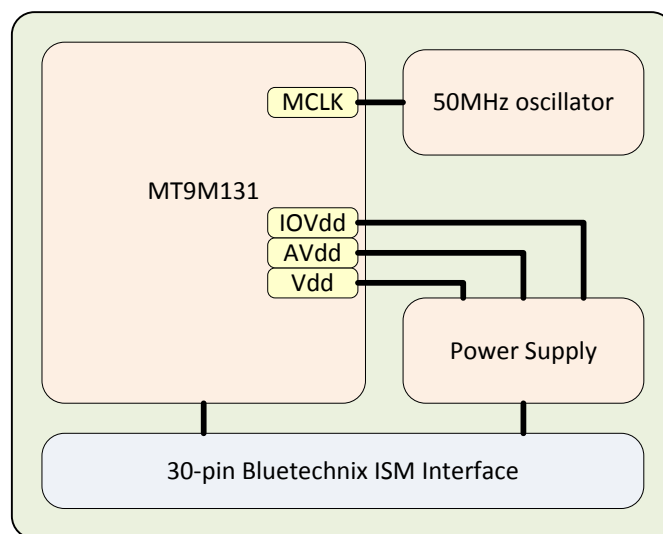


Figure 2-1: ISM-MT9M131 overview

#### 2.1.1 Powering

The ISM-MT9M131 can be powered with only a single supply between 2.5V and 3.1V. If the MCU needs lower I/O voltage levels, a separate I/O voltage supply of min. 1.7V can be applied to the VDDIO pin.



### 2.1.2 Signal Termination

All data and sync signals are serial terminated with 100Ω serial resistors.

## 2.2 Mechanical Outline

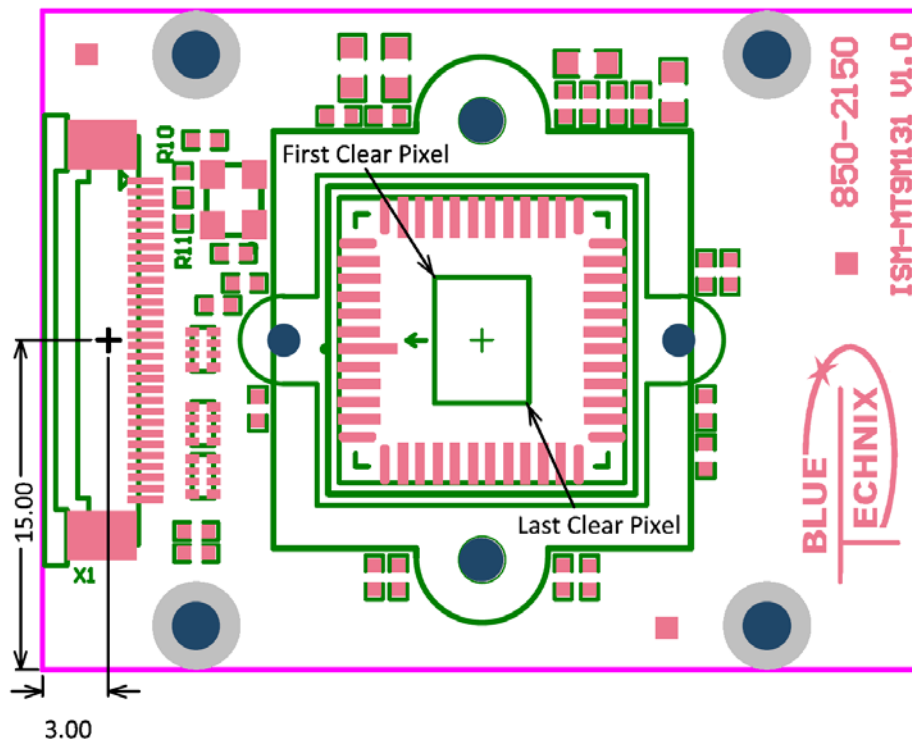


Figure 2-2: Top dimensions (connector position and sensor orientation)

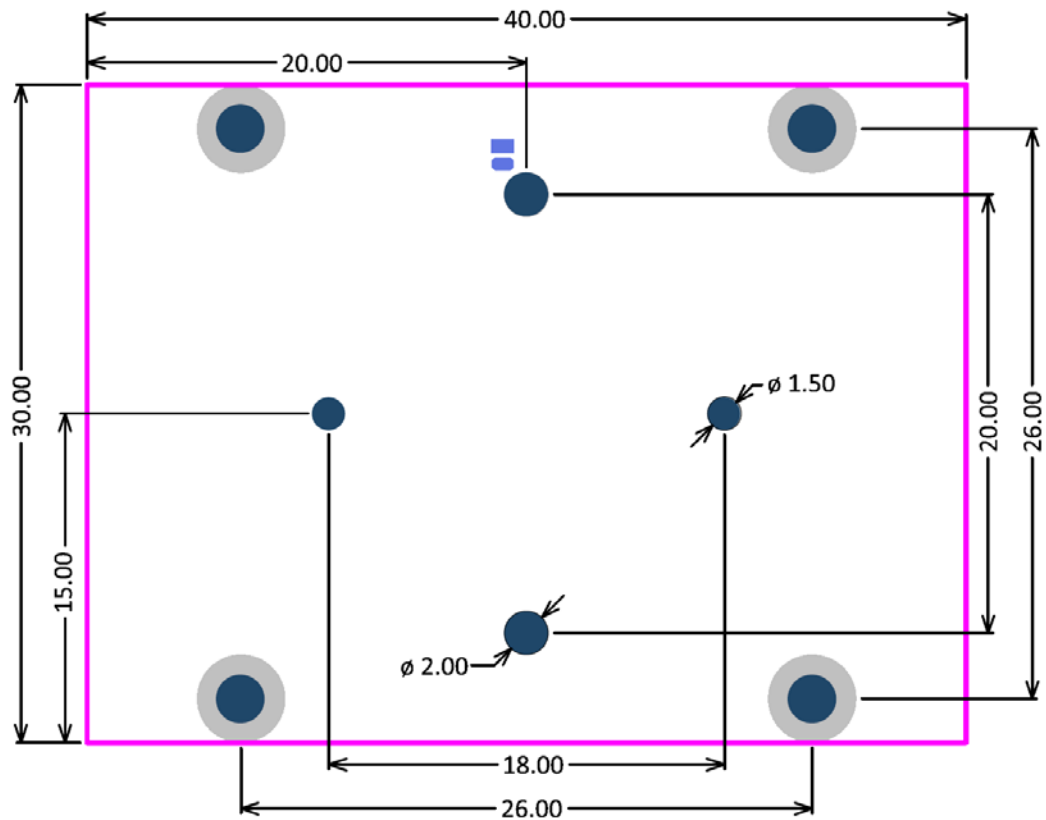


Figure 2-3: Bottom dimensions (mounting holes position)

## 3 Specifications

### 3.1 Electrical Specifications

#### 3.1.1 Operating Conditions

Symbol	Parameter	Min	Typical	Max	Unit
$V_{DD}$	Input supply voltage	2.5	2.8	3.1	V
$I_{2V8}$	Current measurements (2.8V supply)	0.01	TBD	150	mA
$V_{OH}$	High level output voltage	$V_{DD}-0.3$		$V_{DD}$	V
$V_{OL}$	Low level output voltage	0		0.3	V
$I_{OH}$	High level output current	16		26.5	mA
$I_{OL}$	Low level output current	15.9		21.3	mA
$I_{OZ}$	Three state leakage current			10	$\mu$ A
$V_{IH}$	High level input voltage	2			V
$V_{IL}$	Low level input voltage			0.9	V
$I_{IN}$	Input leakage current	-5		5	$\mu$ A
$P_{SXGA15}$	Power consumption with SXGA at 15 fps			170	mA
$P_{QSXGA30}$	Power consumption with QSXGA at 30 fps			90	mA
$P_{QSXGA15}$	Power consumption with QSXGA at 15 fps			70	mA
$P_{QVGA30}$	Power consumption with QVGA at 30 fps			83	mA
$f_{MCLK}$	Master clock frequency		50		MHz

Table 3-1: Electrical characteristics

#### 3.1.2 Maximum Ratings

Stressing the device above the rating listed in the absolute maximum ratings table may cause permanent damage to the device. These are stress ratings only. Operation of the device at these or any other conditions greater than those indicated in the operating sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Symbol	Parameter	Min	Max	Unit
$V_{DD}$	Supply voltage	-0.3	4.0	V
$V_{IO}$	Input or output voltage	-0.3	$V_{DD} + 0.3$	V
$I_{MAX}$	Total Current	0	150	mA
$T_{OP}$	Operating temperature	-30	70	$^{\circ}$ C
$T_{STO}$	Storage temperature	-40	85	$^{\circ}$ C
$\Phi_{AMB}$	Relative ambient humidity		90	%

Table 3-2: Absolute maximum ratings

#### 3.1.3 ESD Sensitivity



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## 4 Connector Description (BLT-ISM-Connector)

The image sensor connector is a standard 0.5mm bottom contact ZIF connector and mates with any 30 pole 0.5mm pitch and 0.4mm thick flat flex cable. To prevent EMI problems we recommend keeping the cable as short as possible.

Pin	Name	Type	Description
1	Vdd	PWR	Voltage Supply
2	GND	PWR	Power Ground
3	SADDR	IpU	Not Connected (internally pulled up with 10kΩ)
4	NC (MCLK)	-	Not connected (Camera Master Clock) <sup>1)</sup>
5	nReset	I	Reset (Active Low)
6	SCL	I	Configuration Bus Clock Line (external pull-up needed)
7	SDA	I/O	Configuration Bus Data Line (external pull-up needed)
8	NC	-	Not connected
9	GND	PWR	Power Ground
10	PCLK	O	Pixel Clock
11	FV	O	Line valid (VSYNC)
12	LV	O	Frame valid (HSYNC)
13	NC	-	Not connected
14	STROBE	O	Strobe Signal
15	NC	-	Not connected
16	NC	-	Not connected
17	D0	O	Pixel Data (LSB)
18	D1	O	Pixel Data
19	VddIO	PWR	I/O Voltage Supply
20	GND	PWR	Power Ground
21	D2	O	Pixel Data
22	D3	O	Pixel Data
23	D4	O	Pixel Data
24	D5	O	Pixel Data
25	GND	PWR	Power Ground
26	D6	O	Pixel Data
27	D7	O	Pixel Data
28	D8	O	Pixel Data
29	D9	O	Pixel Data (MSB)
30	nOE	IpU	Output Enable (Active Low; internally pulled up with 10kΩ)

Table 4-1: BLT-ISM-Connector interface description (X1)

<sup>1)</sup> The Master Clock is generated by the on board oscillator. If a different clock frequency is needed, there is a possibility to apply an external clock signal to a modified Module. For modification details please contact Bluetechnix.

## 5 Support

### 5.1 General Support

General support for products can be found at Bluetechnix' support site <https://support.bluetechnix.at/wiki>

### 5.2 Board Support Packages

Board support packages and software downloads are for registered customers only <https://support.bluetechnix.at/software/>

### 5.3 Blackfin® Software Support

#### 5.3.1 BLACKSheep® OS

BLACKSheep® OS stands for a powerfully and multithreaded real-time operating system (RTOS) originally designed for digital signal processing application development on Analog Devices Blackfin® embedded processors. This high-performance OS is based on the reliable and stable real-time VDK kernel from Analog Devices that comes with VDSP++ IDE. Of course BLACKSheep® OS is fully supported by all Bluetechnix Core-Modules and development hardware.

#### 5.3.2 LabVIEW

You can get LabVIEW embedded support for Bluetechnix Core Modules by Schmid-Engineering AG <http://www.schmid-engineering.ch>.

#### 5.3.3 uClinux

You can get uClinux support (boot loader and uClinux) for Bluetechnix Core Modules at <http://blackfin.uClinux.org>.

### 5.4 i.MX Software Support

#### 5.4.1 Linux

Linux BSP and images of derivatives can be found at Bluetechnix' support site <https://support.bluetechnix.at/wiki> at the software section of the related product.

### 5.5 Blackfin® and i.MX Design Services

Based on more than seven years of experience with Blackfin and i.MX, Bluetechnix offers development assistance as well as custom design services and software development.

#### 5.5.1 Upcoming Products and Software Releases

Keep up to date with all product changes, releases and software updates of Bluetechnix at <http://www.bluetechnix.com>.

## 6 Ordering Information

### 6.1 Image Sensor Module

Article Number	Name	Description
<b>100-3202-1</b>	ISM-MT9M131-Color	Image Sensor Module based on Aptina's MT9M131 image SoC.

Table 6-1: Ordering information ISM

Note that the ISM-MT9M131 is shipped without lens holder and optics. For available accessories see the tables below and take a look on our website for new products.

### 6.2 Related Products

Article Number	Name	Description
<b>100-2243-1</b>	CDEV-BF5xx	Camera Development Board
<b>100-2342-2</b>	eDEV-BF5xx	Extended Blackfin Core Modules Development Board
<b>100-2524-1</b>	EXT-SBC-i.MX51-COMM	Communication Extension Board for the SBC-i.MX51
<b>100-2523-1</b>	EXT-SBC-i.MX51-DISP	Display Extension Board for the SBC-i.MX51
<b>100-1420</b>	DEV-i.MX53 Dev. Kit	Development Kit for the CM-i.MX53

Table 6-2: Ordering information of related products

### 6.3 Lens Holders and Optics

Article Number	Name	Description
<b>100-9043</b>	Lens holder M12 x 0,5 18mm	M12 Lens holder for ISM.
<b>100-9103</b>	ZIF cable 30 pins, 50mm for ISM	50mm ZIF cable for ISM.
<b>100-9104</b>	ZIF cable 30 pins, 150mm for ISM	150mm ZIF cable for ISM.

Table 6-3: Ordering information accessories

CS-Mount equipment can be bought from [www.vd-shop.de](http://www.vd-shop.de)

Article Number	Name	Shop
<b>301461</b>	Lense-Holder CS-Mount Boardlens	<a href="http://www.vd-shop.de">www.vd-shop.de</a>
<b>10208</b>	C-CS-Mount-Adapter	<a href="http://www.vd-shop.de">www.vd-shop.de</a>

Table 6-4 - CS/C Mount equipment

**NOTE:** Custom hard and software developments are available on request! Please contact Bluetechnix ([office@bluetechnix.com](mailto:office@bluetechnix.com)) if you are interested in custom hard- and software developments.

## **7 Dependability**

### **7.1 MTBF**

Please keep in mind that a part stress analysis would be the only way to obtain significant failure rate results, because MTBF numbers just represent a statistical approximation of how long a set of devices should last before failure. Nevertheless, we can calculate an MTBF of the development board using the bill of material. We take all the components into account. The PCB and solder connections are excluded from this estimation. For test conditions we assume an ambient temperature of 30°C of all development board components. We use the MTBF Calculator from ALD (<http://www.aldservice.com/>) and use the reliability prediction MIL-217F2 Part Stress standard. Please get in touch with Bluetechnix ([office@bluetechnix.com](mailto:office@bluetechnix.com)) if you are interested in the MTBF result.

## 8 Product History

### 8.1 Version Information

Version	Date	Changes
1.0	2011 05 24	First release V1.0 of the Hardware.

Table 8-1: Overview product changes

### 8.2 Anomalies

Version	Date	Description
1.0	2011 07 11	No anomalies reported yet.

Table 8-2: Overview product anomalies



## 9 Document Revision History

Version	Date	Document Revision
1	2011 07 11	First release V1.0 of the Document

Table 9-1: Revision history

## 10 List of Abbreviations

Abbreviation	Description
<b>ABR</b>	Auto Black Reference
<b>AWB</b>	Auto White Balance
<b>CM</b>	Core Module
<b>ERS</b>	Electronic Rolling Shutter
<b>ESD</b>	Electrostatic Discharge
<b>FPS</b>	Frames per Second
<b>I</b>	Input
<b>IpU</b>	Input with internal pull-up resistor
<b>I<sup>2</sup>C</b>	Inter-Integrated Circuit
<b>I/O</b>	Input/Output
<b>ISM</b>	Image Sensor Module
<b>MTBF</b>	Mean Time Between Failure
<b>NC</b>	Not Connected
<b>O</b>	Output
<b>OS</b>	Operating System
<b>PLL</b>	Phase-locked Loop
<b>PWR</b>	Power
<b>QSXGA</b>	Quarter Super Extended Graphics Array (640 x 512)
<b>QVGA</b>	Quarter Video Graphics Array (320 x 240)
<b>RTOS</b>	Real-Time Operating System
<b>SADA</b>	Stand Alone Debug Agent
<b>SoC</b>	System on Chip
<b>SXGA</b>	Super Extended Graphics Array (1280 x 1024)
<b>TFT</b>	Thin-Film Transistor
<b>TISM</b>	Tiny Image Sensor Module
<b>ZIF</b>	Zero Insertion Force

Table 10-1: List of abbreviations

## A List of Figures and Tables

### Figures

Figure 2-1: ISM-MT9M131 overview .....	8
Figure 2-2: Top dimensions (connector position and sensor orientation) .....	9
Figure 2-3: Bottom dimensions (mounting holes position) .....	10

### Tables

Table 1-1: Key features .....	6
Table 3-1: Electrical characteristics .....	11
Table 3-2: Absolute maximum ratings .....	11
Table 4-1: BLT-ISM-Connector interface description (X1) .....	12
Table 6-1: Ordering information ISM .....	14
Table 6-2: Ordering information of related products .....	14
Table 6-3: Ordering information accessories .....	14
Table 6-4 - CS/C Mount equipment .....	14
Table 8-1: Overview product changes .....	16
Table 8-2: Overview product anomalies .....	16
Table 9-1: Revision history .....	17
Table 10-1: List of abbreviations .....	18