

**BLUETECHNIX**  
Embedding Ideas

---

# Argos 3D-P320



---

Software User Manual

---

Version 16

---

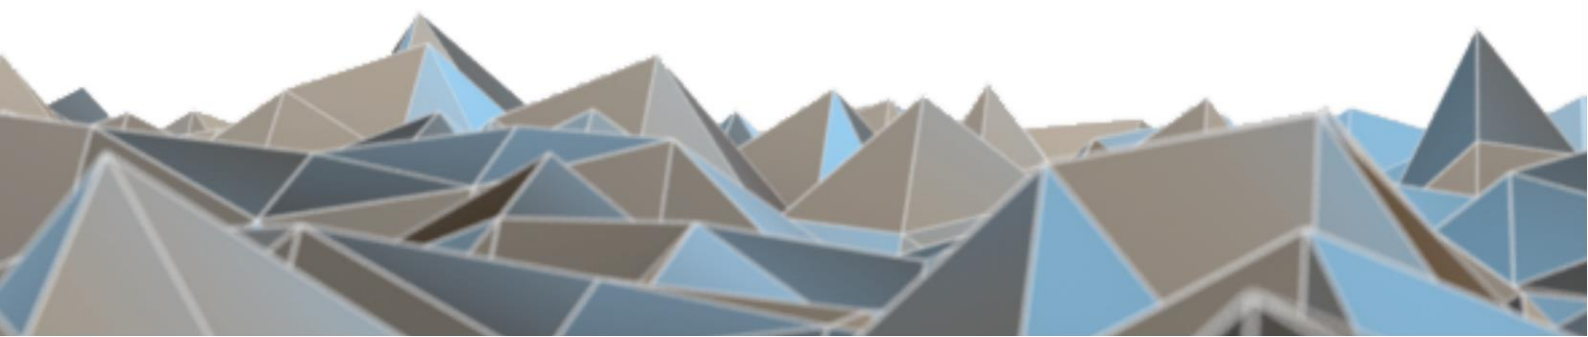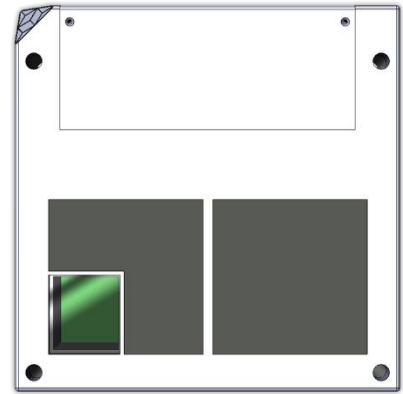



BECOM Bluetechnix GmbH

Gutheil Schoder Gasse 17  
1230 Vienna  
AUSTRIA

office@bluetechnix.com  
www.bluetechnix.com

Argos 3D-P320 – Software User Manual

Document No.: 900-308 / A

Publication date: February 20, 2017

Subject to change without notice. Errors excepted.

This document is protected by copyright. All rights reserved. No part of this document may be reproduced or transmitted for any purpose in any form or by any means, electronically or mechanically, without expressly written permission by Bluetechnix.

Windows is a registered trademark of Microsoft.



## Table of Contents

1	General Information.....	7
1.1	Symbols Used.....	7
2	Overview.....	8
3	Interfacing.....	9
3.1	Control Interface .....	9
3.1.1	Register read.....	10
3.1.2	Result codes .....	11
3.1.3	Register write.....	12
3.1.4	Reset.....	13
3.1.5	Flash Update.....	14
3.1.6	Read data from Flash .....	16
3.1.7	Alive.....	18
3.2	Data Interface.....	19
3.2.1	UDP Streaming Header .....	20
3.2.2	Frame Header .....	20
3.3	Camera Discovery.....	22
3.4	Manual frame triggers .....	24
3.5	External Illumination Interface.....	24
3.6	GPIOs.....	24
3.7	Status Indicator LED .....	24
3.8	PoE power control .....	24
3.9	Secure Shell (SSH) Login.....	25
3.9.1	Change default password.....	25
3.10	Debug UART.....	25
4	Camera Features.....	27
4.1	Basic Settings .....	27
4.2	ToF Image Processing Chain.....	27
4.3	ToF Image Filters .....	28
4.3.1	Median Filter .....	29
4.3.2	Bilateral filter .....	29
4.3.3	Average filter .....	29
4.3.4	Sliding Average Filter .....	29
4.3.5	Frame Average Filter.....	29
4.4	ToF Image Enhancements .....	30
4.4.1	Pixel invalidation .....	30



4.4.2	Temperature compensation.....	30
4.4.3	Combine sequences (HDR) .....	31
4.5	Camera Coordinate System.....	31
4.6	Color Overlay .....	32
4.6.1	Camera Settings .....	32
4.6.2	Configuration .....	33
4.7	Camera Data Format.....	33
4.7.1	Distances and Amplitudes .....	34
4.7.2	Distances, Amplitudes and Color .....	35
4.7.3	Distances and Color .....	36
4.7.4	XYZ Point Cloud .....	37
4.7.5	XYZ Point Cloud and Amplitudes .....	38
4.7.6	Distances and XYZ Point Cloud .....	39
4.7.7	X Coordinate and Amplitudes.....	39
4.7.8	XYZ Point Cloud and Color (Overlay) .....	40
4.7.9	Distances .....	40
4.7.10	4 phases without image processing .....	40
4.7.11	Test mode .....	40
4.7.12	Raw Distances and Amplitudes.....	40
4.7.13	Distance, Amplitudes, and Confidences .....	40
4.7.14	Distances, Amplitudes, Confidences, and Color.....	41
4.7.15	Color .....	42
4.8	ToF Modulation Frequency .....	42
4.9	Frame Rate and Integration Time .....	42
4.10	Sequencing.....	43
4.11	Illumination Pre-Heating.....	43
4.12	Distance Offset Calibration .....	44
4.13	ToF Automatic Exposure Control (AEC).....	44
4.14	Manual Frame Trigger .....	45
4.14.1	Hardware Trigger .....	45
4.14.2	Software Trigger .....	45
4.14.3	ToF Snapshot Function .....	45
4.15	Over Temperature Protection.....	46
4.16	Color Sensor.....	46
4.16.1	UDP Color Sensor Stream.....	47
4.16.2	Color Sensor Control .....	47



4.17	Save Registers.....	47
4.18	Ethernet/IP Settings .....	47
4.18.1	MAC Address.....	47
4.18.2	IP/TCP/UDP Settings.....	48
4.19	Reset to Factory Default.....	48
4.20	Firmware Update.....	48
4.20.1	Firmware Recovery .....	48
4.21	Logging.....	48
4.22	Error Indication .....	49
5	Register Description.....	50
5.1	General registers.....	50
5.2	Registers for GPIO Control .....	53
5.3	Registers for Color Image .....	54
5.4	More General Registers .....	55
5.5	Registers for Sequencing.....	56
5.6	Registers for Illumination Preheating .....	56
5.7	Overlay Configuration .....	57
5.8	Automatic Exposure Control.....	58
5.9	Registers for Test Commands .....	58
5.10	Registers for Device Update .....	59
5.11	Registers for Filter Configuration .....	59
5.12	Registers for Advanced Image Processing .....	60
5.13	Registers for Ethernet configuration .....	60
6	Firmware History .....	62
6.1	Version Information .....	62
6.2	Anomalies.....	65
7	Software .....	67
7.1	BltTofApi.....	67
7.2	MATLAB SDK.....	67
7.3	BltTofSuite.....	67
8	Support.....	68
8.1	General Support.....	68
8.2	Software Downloads.....	68
8.3	Related Products .....	68
8.4	Camera Development Package .....	68
9	Document Revision History.....	69



A	Index.....	71
B	List of Figures and Tables .....	73

© Bluetechnix 2017

All Rights Reserved.

The information herein is given to describe certain components and shall not be considered as a guarantee of characteristics.

Terms of delivery and rights of technical change reserved.

We hereby disclaim any warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Bluetechnix makes and you receive no warranties or conditions, express, implied, statutory or in any communication with you. Bluetechnix specifically disclaims any implied warranty of merchantability or fitness for a particular purpose.

Bluetechnix takes no liability for any damages and errors causing of the usage of this board. The user of this board is responsible by himself for the functionality of his application. He is allowed to use the board only if he has the qualification. More information is found in the General Terms and Conditions (AGB).

#### Information

For further information on technology, delivery terms and conditions and prices please contact Bluetechnix (<http://www.bluetechnix.com>).

#### Warning

Due to technical requirements components may contain dangerous substances.



## 1 General Information

This guide applies to the Argos 3D-P320 camera platform from Bluetechnix. Follow this guide chapter by chapter to set up and understand your product. If a section of this document only applies to certain camera parts, this is indicated at the beginning of the respective section.

### 1.1 Symbols Used

This guide makes use of a few symbols and conventions:



#### Warning

Indicates a situation which, if not avoided, could result in minor or moderate injury and/or property damage or damage to the device.



#### Caution

Indicates a situation which, if not avoided, may result in minor damage to the device, in malfunction of the device or in data loss.



#### Note

Notes provide information on special issues related to the device or provide information that will make operation of the device easier.


#### Procedures

**A procedure always starts with a headline**

1. The number indicates the step number of a certain procedure you are expected to follow. Steps are numbered sequentially.

This sign ➤ indicates an expected result of your action.

#### References

 This symbol indicates a cross reference to a different chapter of this manual or to an external document.



## 2 Overview

The document describes the necessary steps and settings to work with the Argos 3D-P320 and describes the firmware dependent interfaces.

**This document applies to firmware version 0.14.1.**

For a hardware compatibility list please refer to our support site.

### Software and documentation

 <https://support.bluetechnix.at/index.html>



## 3 Interfacing

The Argos 3D-P320 provides control and data interfaces via Gigabit-Ethernet.

The control interface is used to set and read the configuration of the Argos via a set of registers. Refer to chapter 6 for a detailed register description.

The data interface provides a continuous stream of ToF (and color) data depending on the configuration.

### Note



Bluetechnix provides an abstraction of control and data interfaces by means of the *BltTofApi*. If you use this API, you need not be familiar with control and data interface in detail. Refer to chapter 7.1 for the *BltTofApi*.

### 3.1 Control Interface

The Argos 3D-P320 can be configured using a TCP/IP connection. For the control interface the Argos is listening to the following factory default IP settings:

- **IP-Address:** 192.168.0.10
- **Subnet mask:** 255.255.255.0
- **Network protocol:** TCP
- **TCP port:** 10001

### Note



The Ethernet IP settings can be configured using the **Eth0\_** registers. The changes become active on writing register **Eth0Gateway1**.

Once a TCP connection has been established the Argos can be configured using a dedicated set of command frames. The Argos answers to each command frame with a dedicated response frame. The following table shows the currently supported command frames:

Command frame	Description
<b>Register Read</b>	Used to read one or more consecutive registers
<b>Register Write</b>	Used to write one or more consecutive registers
<b>Reset</b>	Used to reset/reboot the Argos 3D-P320
<b>Flash Update</b>	Used to either update the firmware or the boot loader
<b>Alive</b>	Used to keep the TCP control connection alive. If no command is sent for 10 seconds, the Argos closes the control interface connection and waits for a new incoming connection request. Up to 5 concurrent control connections are supported.

Table 1: Supported command frames

The following section describes each command frame and the expected answer in detail. To be able to communicate with the Argos 3D-P320 the frame must be composed exactly as described.



The following types are used:

- **UInt8:** 8 bit unsigned integer
- **UInt16:** 16 bit unsigned integer
- **UInt32:** 32 bit unsigned integer

**Note**  
Values with '0x' as prefix are hexadecimal values.

### 3.1.1 Register read

#### Command frame

Addr	Field	Type	Value	Description
0x00	Preamble	UInt16 (high byte first)	0xA1EC	Unique identifier, start of header
0x02	ProtocolVersion	UInt8	0x03	This description refers to protocol version V3.0
0x03	Command	UInt8	0x03	Command code for read registers
0x04	SubCommand	UInt8		Ignored
0x05	Status	UInt8		Ignored
0x06	Flags	UInt16	Refer to table	Optional flags
0x08	Length	UInt32 (high byte first)	<# of bytes to read>	Number of bytes to read. Must be a multiple of two. The length divided by two represents the # of registers to read.
0x0C	RegisterAddress	UInt16 (high byte first)	<Register Address>	Start register address for read command
0x0E	HeaderData2	UInt8		Ignored
0x0F	HeaderData3	UInt8		Ignored
0x10	Reserved (42 bytes)	UInt8[]		Ignored
0x3A	DataCrc32	UInt32 (high byte first)	0x0	No data present after header.
0x3E	HeaderCrc16	UInt16 (high byte first)	<CRC16 checksum>	Checksum over 60 bytes of Header: 0x02 – 0x3D <sup>1)</sup>

Table 2: Register read command frame

Note 1): For the CRC16 calculation the CRC-CCITT is used (Polynom: 0x1021, start value: 0). Please ask the Bluetechnix support for an implementation example of the CRC-CCITT.

#### Response frame

Addr	Field	Type	Value	Description
0x00	Preamble	UInt16 (high byte first)	0xA1EC	Unique identifier, start of header
0x02	ProtocolVersion	UInt8	0x03	This document refers to protocol version V3.0
0x03	Command	UInt8	0x03	Command code for read registers



Addr	Field	Type	Value	Description
0x04	SubCommand	UInt8		Ignore
0x05	Status	UInt8	Refer to table	Result code
0x06	Flags	UInt16	Refer to table	Optional flags
0x08	Length	UInt32 (high byte first)	<# of bytes read>	The number of bytes read (length of <Data> in bytes). The length divided by two represents the # of registers read.
0x0C	RegisterAddress	UInt16 (high byte first)	<Register Address>	Start register address of read data
0x0E	HeaderData2	UInt8		Ignored
0x0F	HeaderData3	UInt8		Ignored
0x10	Reserved (42 bytes)	UInt8[]		Ignored
0x3A	DataCrc32	UInt32 (high byte first)	<CRC32 checksum>	Checksum over <Data> <sup>2)</sup>
0x3E	HeaderCrc16	UInt16 (high byte first)	<CRC16 checksum>	Checksum over 60 bytes of Header: 0x02 – 0x3D <sup>1)</sup>
0x40	Data	UInt16[] (high byte first)	<result data>	Result: One or more 16 bit values

Table 3: Register read response frame

Note 1): For the CRC16 calculation the CRC-CCITT is used (Polynom: 0x1021, start value: 0). Please ask the Bluetechnix support for an implementation example of the CRC-CCITT.

Note 2): For the CRC32 calculation the CRC-32 is used (Polynom: 0x04C11DB7, start value: 0xFFFFFFFF). Please ask the Bluetechnix support for an implementation example of the CRC-32.

### Flags

Flags	Description
Bit 0	1: Ignore DataCrc32

Table 4: Register read flag description

## 3.1.2 Result codes

Status	Description
0x00	Ok
0x0D	Invalid handle (internal error)
0x0F	Illegal write: The Address is not valid or the register is not write-enabled
0x10	Illegal read: The Address is not valid/The requested file is not available
0x11	Register end reached
0xF8	Invalid Packet Number
0xF9	IP Version not supported
0xFA	Length exceeds maximum file size (not enough memory for file download)
0xFB	HeaderCrc16 mismatch
0xFC	DataCrc32 mismatch
0xFD	Length invalid: Cannot be equal 0
0xFE	Length invalid: Cannot be greater 0
0xFF	Unknown command

Table 5: Result codes



### 3.1.3 Register write

#### Command frame

Addr	Field	Type	Value	Description
0x00	Preamble	Uint16 (high byte first)	0xA1EC	Unique identifier, start of header
0x02	ProtocolVersion	Uint8	0x03	This document refers to version V3.0
0x03	Command	Uint8	0x04	Command code for write registers
0x04	SubCommand	Uint8		Ignored
0x05	Status	Uint8		Ignored
0x06	Flags	Uint16	Refer to table	Optional flags
0x08	Length	Uint32 (high byte first)	<# of bytes to write>	The number of bytes to write. Must be a multiple of two and match length of <Data> in bytes. The length divided by two represents the # of registers to write.
0x0C	RegisterAddress	Uint16 (high byte first)	<Register Address>	Start register address for write command
0x0E	HeaderData2	Uint8		Ignored
0x0F	HeaderData3	Uint8		Ignored
0x10	Reserved (42 bytes)	Uint8[]		Ignored
0x3A	DataCrc32	Uint32 (high byte first)	<CRC32 checksum>	Checksum over <Data> <sup>2)</sup>
0x3E	HeaderCrc16	Uint16 (high byte first)	<CRC16 checksum>	Checksum over 60 bytes of Header: 0x02 – 0x3D <sup>1)</sup>
0x40	Data	Uint16[] (high byte first for each register value)	<data to write>	One or more 16 bit values in a stream that should be written

Table 6: Register write command frame

Note 1): For the CRC16 calculation the CRC-CCITT is used (Polynom: 0x1021, start value: 0). Please ask the Bluetechnix support for an implementation example of the CRC-CCITT.

Note 2): For the CRC32 calculation the CRC-32 is used (Polynom: 0x04C11DB7, start value: 0xFFFFFFFF). Please ask the Bluetechnix support for an implementation example of the CRC-32.

#### Response frame

Addr	Field	Type	Value	Description
0x00	Preamble	Uint16 (high byte first)	0xA1EC	Unique identifier, start of header
0x02	ProtocolVersion	Uint8	0x03	This document refers to version V3.0
0x03	Command	Uint8	0x04	Command code for write registers
0x04	SubCommand	Uint8		Ignored
0x05	Status	Uint8	Refer to table	Result code
0x06	Flags	Uint16	Refer to table	Optional flags
0x08	Length	Uint32 (high byte first)	0	No <Data> present



Addr	Field	Type	Value	Description
0x0C	RegisterAddress	UInt8 (high byte first)	<Register Address>	Same as in sent command
0x0E	HeaderData2	UInt8		Ignored
0x0F	HeaderData3	UInt8		Ignored
0x10	Reserved (42 bytes)	UInt8[]		Ignored
0x3A	DataCrc32	UInt32 (high byte first)	0x0	No data present after header.
0x3E	HeaderCrc16	UInt16 (high byte first)	<CRC16 checksum>	Checksum over 60 bytes of Header: 0x02 – 0x3D <sup>1)</sup>

Table 7: Register write response frame

Note 1): For the CRC16 calculation the CRC-CCITT is used (Polynom: 0x1021, start value: 0). Please ask the Bluetechnix support for an implementation example of the CRC-CCITT.

#### Flags

Flags	Description
Bit 0	1: Ignore DataCrc32

Table 8: Register write flag description

#### Result codes

Please refer to Table 3-5.

### 3.1.4 Reset

#### Command frame

Addr	Field	Type	Value	Description
0x00	Preamble	UInt16 (high byte first)	0xA1EC	Unique identifier, start of header
0x02	ProtocolVersion	UInt8	0x03	This document refers to version V3.0
0x03	Command	UInt8	0x07	Command code for reset
0x04	SubCommand	UInt8		Ignored
0x05	Status	UInt8		Ignored
0x06	Flags	UInt16	Refer to table	Optional flags
0x08	Length	UInt32 (high byte first)	0x0	No <Data> present
0x0C	HeaderData0	UInt8		Ignored
0x0D	HeaderData1	UInt8		Ignored
0x0E	HeaderData2	UInt8		Ignored
0x0F	HeaderData3	UInt8		Ignored
0x10	Reserved (42 bytes)	UInt8[]		Ignored
0x3A	DataCrc32	UInt32 (high byte first)	0x0	No data present after header.
0x3E	HeaderCrc16	UInt16 (high byte first)	<CRC16 checksum>	Checksum over 60 bytes of Header: 0x02 – 0x3D <sup>1)</sup>

Table 9: Reset command frame

Note 1): For the CRC16 calculation the CRC-CCITT is used (Polynom: 0x1021, start value: 0). Please ask the Bluetechnix support for an implementation example of the CRC-CCITT.



### Response frame

Addr	Field	Type	Value	Description
0x00	Preamble	Uint16 (high byte first)	0xA1EC	Unique identifier, start of header
0x02	ProtocolVersion	Uint8	0x03	This document refers to version V3.0
0x03	Command	Uint8	0x07	Command code for reset
0x04	SubCommand	Uint8		Ignored
0x05	Status	Uint8	Refer to table	Result code
0x06	Flags	Uint16	Refer to table	Optional flags
0x08	Length	Uint32 (high byte first)	0x0	No <Data> present
0x0C	HeaderData0	Uint8		Ignored
0x0C	HeaderData1	Uint8		Ignored
0x0E	HeaderData2	Uint8		Ignored
0x0F	HeaderData3	Uint8		Ignored
0x10	Reserved (42 bytes)	Uint8[]		Ignored
0x3A	DataCrc32	Uint32 (high byte first)	0x0	No data present after header.
0x3E	HeaderCrc16	Uint16 (high byte first)	<CRC16 checksum>	Checksum over 60 bytes of Header: 0x02 – 0x3D <sup>1)</sup>

Table 10: Reset response frame

Note 1): For the CRC16 calculation the CRC-CCITT is used (Polynom: 0x1021, start value: 0). Please ask the Bluetechnix support for an implementation example of the CRC-CCITT.

### Flags

Flags	Description
	Currently no flags defined for this command

Table 11: Reset flag description

### Result codes

Please refer to Table 3-5.

## 3.1.5 Flash Update

### Command frame

Addr	Field	Type	Value	Description
0x00	Preamble	Uint16 (high byte first)	0xA1EC	Unique identifier, start of header
0x02	ProtocolVersion	Uint8	0x03	This document refers to protocol version V3.0
0x03	Command	Uint8	0x0B or 0x0C	0x0B: Flash boot loader 0x0C: Flash application 0x15: Flash lens calibration data 0x16: Flash wiggling correction data 0x18: Flash geometric model parameters data 0x19: Flash overlay calibration data



Addr	Field	Type	Value	Description
				0x29: Flash intrinsic ToF sensor calibration file (legacy) 0x2A: Flash intrinsic color sensor calibration file (legacy) 0x2B: Flash extrinsic calibration file (legacy)
0x04	SubCommand	UInt8	Refer to table	Indicates which flash to write to
0x05	Status	UInt8		Ignored
0x06	Flags	UInt16	Refer to table	Optional flags <sup>3)</sup>
0x08	Length	UInt32 (high byte first)	<# of bytes to write>	The size of the binary file to flash
0x0C	FlashAddress	UInt32 (high byte first)	<Flash Address>	Ignored
0x10	Reserved (42 bytes)	UInt8[]		Ignored
0x3A	DataCrc32	UInt32 (high byte first)	<CRC32 checksum>	Checksum over <Data> <sup>2)</sup>
0x3E	HeaderCrc16	UInt16 (high byte first)	<CRC16 checksum>	Checksum over 60 bytes of Header: 0x02 – 0x3D <sup>1)</sup>
0x40	Data	UInt8[]	<binary loader file>	The file to flash as a binary byte stream

Table 12: Flash update command frame

Note 1): For the CRC16 calculation the CRC-CCITT is used (Polynom: 0x1021, start value: 0). Please ask the Bluetechnix support for an implementation example of the CRC-CCITT.

Note 2): For the CRC32 calculation the CRC-32 is used (Polynom: 0x04C11DB7, start value: 0xFFFFFFFF). Please ask the Bluetechnix support for an implementation example of the CRC-32.

Note 3): The DataCrc32 is mandatory, the appropriate flag must be set to 0.

#### Response frame

Addr	Field	Type	Value	Description
0x00	Preamble	UInt16 (high byte first)	0xA1EC	Unique identifier, start of header
0x02	ProtocolVersion	UInt8	0x03	This document refers to protocol version V3.0
0x03	Command	UInt8	0x0B or 0x0C	0x0B: Flash boot loader 0x0C: Flash Application
0x04	SubCommand	UInt8	Refer to table	Indicates which flash to write to
0x05	Status	UInt8	Refer to table	Result code
0x06	Flags	UInt16	Refer to table	Optional flags
0x08	Length	UInt32 (high byte first)	0x0	No <Data> present
0x0C	HeaderData0	UInt8		Ignored
0x0D	HeaderData1	UInt8		Ignored
0x0E	HeaderData2	UInt8		Ignored
0x0F	HeaderData3	UInt8		Ignored
0x10	Reserved (42 bytes)	UInt8[]		Ignored
0x3A	DataCrc32	UInt32 (high byte first)	0x0	No data present after header.



Addr	Field	Type	Value	Description
0x3E	HeaderCrc16	Uint16 (high byte first)	<CRC16 checksum>	Checksum over 60 bytes of Header: 0x02 – 0x3D <sup>1)</sup>

Table 13: Flash update response frame

Note 1): For the CRC16 calculation the CRC-CCITT is used (Polynom: 0x1021, start value: 0). Please ask the Bluetechnix support for an implementation example of the CRC-CCITT.

#### Subcommand

SubCommand	Description
Ignored	For boot loader and application update

Table 14: Flash update subcommand description

#### Flags

Flags	Description
Bit 0	1: Ignore DataCrc32

Table 15: Flash update flag description

#### Result codes

Please refer to Table 3-5.

### 3.1.6 Read data from Flash

#### Command frame

Addr	Field	Type	Value	Description
0x00	Preamble	Uint16 (high byte first)	0xA1EC	Unique identifier, start of header
0x02	ProtocolVersion	Uint8	0x03	This document refers to protocol version V3.0
0x03	Command	Uint8	→	0x8D: Read intrinsic ToF sensor calibration file 0x8E: Read intrinsic color sensor calibration file 0x8F: Read extrinsic calibration file
0x04	SubCommand	Uint8		Ignored
0x05	Status	Uint8		Ignored
0x06	Flags	Uint16	Refer to table	Optional flags <sup>3)</sup>
0x08	Length	Uint32 (high byte first)	<# of bytes to write>	The size of the binary file to flash
0x0C	FlashAddress	Uint32 (high byte first)		Ignored
0x10	Reserved (42 bytes)	Uint8[]		Ignored
0x3A	DataCrc32	Uint32 (high byte first)	<CRC32 checksum>	Checksum over <Data> <sup>2)</sup>
0x3E	HeaderCrc16	Uint16 (high byte first)	<CRC16 checksum>	Checksum over 60 bytes of Header: 0x02 – 0x3D <sup>1)</sup>
0x40	Data	Uint8[]	<binary loader file>	The file to read as a binary byte stream



Table 16: Flash update command frame

Note 1): For the CRC16 calculation the CRC-CCITT is used (Polynom: 0x1021, start value: 0). Please ask the Bluetechnix support for an implementation example of the CRC-CCITT.

Note 2): For the CRC32 calculation the CRC-32 is used (Polynom: 0x04C11DB7, start value: 0xFFFFFFFF). Please ask the Bluetechnix support for an implementation example of the CRC-32.

Note 3): The DataCrc32 is mandatory, the appropriate flag must be set to 0.

#### Response frame

Addr	Field	Type	Value	Description
0x00	Preamble	Uint16 (high byte first)	0xA1EC	Unique identifier, start of header
0x02	ProtocolVersion	Uint8	0x03	This document refers to protocol version V3.0
0x03	Command	Uint8		Same as in send command
0x04	SubCommand	Uint8		Same as in send command
0x05	Status	Uint8	Refer to table	Result code
0x06	Flags	Uint16	Refer to table	Optional flags
0x08	Length	Uint32 (high byte first)	0x0	No <Data> present
0x0C	HeaderData0	Uint8		Ignored
0x0D	HeaderData1	Uint8		Ignored
0x0E	HeaderData2	Uint8		Ignored
0x0F	HeaderData3	Uint8		Ignored
0x10	Reserved (42 bytes)	Uint8[]		Ignored
0x3A	DataCrc32	Uint32 (high byte first)	0x0	No data present after header.
0x3E	HeaderCrc16	Uint16 (high byte first)	<CRC16 checksum>	Checksum over 60 bytes of Header: 0x02 – 0x3D <sup>1)</sup>

Table 17: Flash update response frame

Note 1): For the CRC16 calculation the CRC-CCITT is used (Polynom: 0x1021, start value: 0). Please ask the Bluetechnix support for an implementation example of the CRC-CCITT.

#### Subcommand

SubCommand	Description
Ignored	

Table 18: Flash update subcommand description

#### Flags

Flags	Description
Bit 0	1: Ignore DataCrc32

Table 19: Flash update flag description

#### Result codes

Please refer to Table 3-5.



### 3.1.7 Alive

#### Command frame

Addr	Field	Type	Value	Description
0x00	Preamble	Uint16 (high byte first)	0xA1EC	Unique identifier, start of header
0x02	ProtocolVersion	Uint8	0x03	This document refers to protocol version V3.0
0x03	Command	Uint8	0xFE	Command code for 'Alive message'
0x04	SubCommand	Uint8		Ignored
0x05	Status	Uint8		Ignored
0x06	Flags	Uint16	Refer to table	Optional flags
0x08	Length	Uint32	0x0	No <Data> present
0x0C	HeaderData0	Uint8		Ignored
0x0D	HeaderData1	Uint8		Ignored
0x0E	HeaderData2	Uint8		Ignored
0x0F	HeaderData3	Uint8		Ignored
0x10	Reserved (42 bytes)	Uint8[]		Ignored
0x3A	DataCrc32	Uint32 (high byte first)	0x0	No data present after header.
0x3E	HeaderCrc16	Uint16 (high byte first)	<CRC16 checksum>	Checksum over 60 bytes of Header: 0x02 – 0x3D <sup>1)</sup>

Table 20: Alive command frame

Note 1): For the CRC16 calculation the CRC-CCITT is used (Polynom: 0x1021, start value: 0). Please ask the Bluetechnix support for an implementation example of the CRC-CCITT.

#### Response frame

Addr	Field	Type	Value	Description
0x00	Preamble	Uint16 (high byte first)	0xA1EC	Unique identifier, start of header
0x02	ProtocolVersion	Uint8	0x03	This document refers to protocol version V3.0
0x03	Command	Uint8	0xFE	Command code for 'Alive message'
0x04	SubCommand	Uint8		Indicates which flash to write to
0x05	Status	Uint8	Refer to table	Result code
0x06	Flags	Uint16	Refer to table	Optional flags
0x08	Length	Uint32 (high byte first)	0x0	No <Data> present
0x0C	HeaderData0	Uint8		Ignored
0x0D	HeaderData1	Uint8		Ignored
0x0E	HeaderData2	Uint8		Ignored
0x0F	HeaderData3	Uint8		Ignored
0x10	Reserved (42 bytes)	Uint8[]		Ignored
0x3A	DataCrc32	Uint32 (high byte first)	0x0	No data present after header.
0x3E	HeaderCrc16	Uint16 (high byte first)	<CRC16 checksum>	Checksum over 60 bytes of Header: 0x02 – 0x3D <sup>1)</sup>

Table 21: Alive response frame



Note 1): For the CRC16 calculation the CRC-CCITT is used (Polynom: 0x1021, start value: 0). Please ask the Bluetechnix support for an implementation example of the CRC-CCITT.

## Flags

Flags	Description
	Currently no flags defined for this command

Table 22: Alive flag description

## Result codes:

Please refer to Table 3-5.

## 3.2 Data Interface

A UDP stream delivers ToF and/or color data from the Argos. Each UDP packet contains a UDP streaming header and up to 1400 bytes of frame data (Ethernet, IP, and UDP headers are not shown in Figure 3-1).

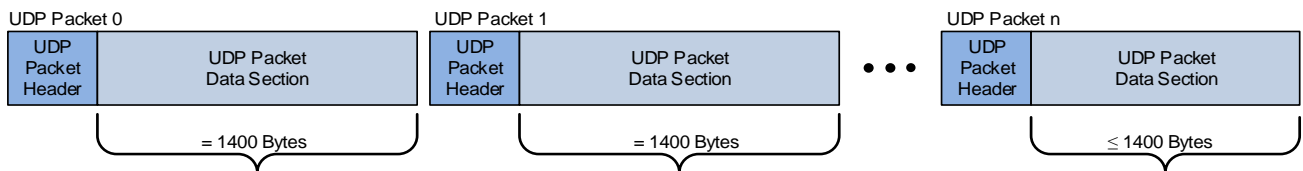


Figure 3-1: UDP streaming data format

The following types are used in the data streaming protocol:

- **UInt8:** 8 bit unsigned integer
- **UInt16:** 16 bit unsigned integer
- **UInt32:** 32 bit unsigned integer

### Note



Values with '0x' as prefix are hexadecimal values.

The UDP streaming is enabled by factory default. The Argos streams to the following IP settings:

- **IP-Address:** Multicast address 224.0.0.1
- **UDP port:** 10002

### Note



The UDP stream settings can be configured using the **Eth0\_** registers.



As multicast is used more than one can receive the stream within the same subnet at the same time. The client has to join the appropriate multi cast group and open the port 10002 on his local network interface card (NIC) where the Argos is connected to. The receiver should receive the stream and interpret it as the following protocol description shows.

#### Note



Be aware that a multicast stream may slow down your Ethernet network as the stream must be spread to all active links of switches/hubs and routers.

### 3.2.1 UDP Streaming Header

The current protocol version is **1**.

Each frame transmitted on the UDP stream is split into packets of max. 1432 bytes length (except the last which may be smaller). Each packet consists of a 32 byte UDP Streaming Header and up to 1400 bytes of frame data (refer to Figure 3-1).

Addr	Field	Type	Value	Description
0x00	Version	Uint16 (high byte first)	0x0001	Protocol version
0x02	FrameCounter	Uint16 (high byte first)		Continuous frame counter. On an overrun it restarts at 0.
0x04	PacketCounter	Uint16 (high byte first)		Actual packet #. The frame data must be recomposed in order of the packet #.
0x06	DataLength	Uint16 (high byte first)		Length of the image data section of the current packet.
0x08	FrameSize	Uint32 (high byte first)		Size of the image data. It may be used to calculate the expected # of packets for a frame.
0x0C	PacketCRC32	Uint16 (high byte first)		CRC32 checksum over the entire packet (pos 0 to pos n) <sup>1)</sup>
0x10	Flags	Uint32	Refer to Table 24	Optional flags
0x14	Reserved			Reserved for future use
0x20	ImageData			Image data section

Table 23: UDP packet header

Note 1): For the CRC32 calculation the CRC-32 is used (Polynom: 0x04C11DB7, start value: 0xFFFFFFFF). Please ask the Bluetechnix support for an implementation example of the CRC-32.

#### Flags

Flags	Description
Bit 0	1: Ignore DataCrc32

Table 24: UDP packet header flag description

### 3.2.2 Frame Header

The current header version is **3**.



The frame data itself is split into a 64 byte frame header and the frame data section. The format of the frame data depends on the selected image format and is described in chapter 4.3. Below you can find the format of the 64 byte frame header.

Addr	Field	Type	Value	Description
0x00	Reserved	Uint16	0xFFFF	
0x02	HeaderVersion	Uint16 (high byte first)	0x0003	Current header version
0x04	ImageWidth	Uint16 (high byte first)	0x00A0	Width of the image in pixels.
0x06	ImageHeight	Uint16 (high byte first)	0x0078	Height of the image in pixels.
0x08	NofChannels	Uint8		Nof data channels. Depends on the image format
0x09	BytesPerPixel	Uint8	0x02	Bytes per pixel of the 3D image data.
0x0A	ImageFormat	Uint16 (high byte first)		The content is the same as in the register <i>ImageDataFormat</i> .
0x0C	Timestamp	Uint32 (high byte first)		Timestamp of the actual image in $\mu$ s
0x10	FrameCounter	Uint16 (high byte first)		Continuous frame counter. On an overrun it restarts at 0.
0x12	Reserved			
0x1A	MainTemp	Uint8		TIM (ToF Image sensor Module) temperature in $^{\circ}\text{C} + 50$ . Decrement this field by 50 to get the current TIM temperature. A value of 0xFF means sensor error.
0x1B	LEDtemp	Uint8		LIM (Light Module) Temperature in $^{\circ}\text{C} + 50$ . Decrement this field by 50 to get the current LIM temperature. A value of 0xFF means sensor error.
0x1C	FirmwareVersion	Uint16 (high byte first)		Content of the register <i>FirmwareInfo</i>
0x1E	Magic	Uint16 (high byte first)	0x3331 or 0xCC32	0x3331: Magic bytes indicating header version 3.1. Default. 0xCC32: Magic bytes indicating header version 3.2. Used only in combination with JPEG encoded color channel.
0x20	IntegrationTime	Uint16 (high byte first)		ToF Integration time in $\mu$ s.
0x22	ModFreq	Uint16 (high byte first)		ToF Modulation frequency with resolution 10 kHz (e.g., a value of 0x1234 means frequency 46.6 MHz)
0x24	Temp3	Uint8		Base Board Temperature sensor value in $^{\circ}\text{C} + 50$ . Decrement this field by 50 to get the current temperature. A value of 0xFF means sensor error.
0x25	ColorMode	Uint8		Pixel format of color sensor frame: 0...No color data in frame



Addr	Field	Type	Value	Description
				1...RGB565 2...JPEG <i>Is always zero, unless ImageFormat is 2 or 6.</i>
0x26	ColorSensorWidth	Uint16 (high byte first)		Width in pixels of color sensor frame. <i>Is zero, unless ImageFormat is 2 or 6. Can be zero with ImageFormat 2 or 6 (=no sensor data available).</i>
0x28	ColorSensorHeight	Uint16 (high byte first)		Height in pixels of color sensor frame. <i>Is zero, unless ImageFormat is 2 or 6. Can be zero with ImageFormat 2 or 6 (=no sensor data available)</i>
0x2A	SequenceNumber	Uint8		ToF sequence number of the data frame
0x2B	Reserved			
0x2C	ColorChannelLength	Uint32 (high byte first)		Length of color channel data in bytes.  Variable for JPEG color mode.  Fixed for RGB565 color mode (= ColorSensorWidth * ColorSensorHeight * 2)
0x30	Reserved			
0x3E	CRC16	Uint16 (high byte first)		CRC16 checksum over the header without the first two bytes and the CRC16 checksum itself (addr 0x02 to addr 0x3D) <sup>1)</sup>

Table 25: Frame header

Note 1): For the CRC16 calculation the CRC-CCITT is used (Polynom: 0x1021, start value: 0). Please ask the Bluetechnix support for an implementation example of the CRC-CCITT.

### 3.3 Camera Discovery

The Argos 3D-P320 supports a discovery protocol via UDP/IP. It allows the discovery of the camera within the Ethernet network and the retrieval of camera properties.

The discovery service listens on UDP address 255.255.255.255 (broadcast) and port 11003.

#### Note



Discovery is supported by the BltTofApi and the BltTofSuite

 Chapter 7

See Table 26 for the specification of a discovery packet which is sent to the camera. The length is 64 (0x40) bytes.

Addr	Field	Type	Value	Description
00	Preamble (high-byte first)	Uint16	0xa1ec	Unique identifier, start of header
02	ProtocolVersion	Uint8	3	Version: V3.0
03	Command	Uint8	253	Command code for discovery
04	SubCommand	Uint8	XX	Ignored
05	Status	Uint8	XX	Ignored
06	Flags	Uint16	<flags>	[Bit 0] 1..Ignore DataCrc32
08	Length (high-byte first)	Uint32	0	No Data



Addr	Field	Type	Value	Description
0C	HeaderData0 (high byte) HeaderData1 (low byte)	UInt16	Device Type	Device type to discover (0 for any device)
0E	HeaderData2	UInt8	XX	Ignored
0F	HeaderData3	UInt8	XX	Ignored
10	CallbackIpVersion	UInt8	4	4: IPv4
11	CallbackIpAddr (high byte first)	UInt32	<IP address>	The destination address for the response If set to 0.0.0.0, the device sends the packet back to the source address
15	CallbackPort (high byte first)	UInt16	<IP port>	The destination port for the response If set to 0, the device sends the packet back to the source port
17	Reserved (35 bytes)	35*UInt8	XX	Ignored
3A	DataCrc32	UInt32	XX	Ignored
3E	HeaderCrc16	UInt16	<CRC16 sum>	Checksum over 60 bytes of Header: 0x02 – 0x3D

Table 26: Discovery packet specification

Table 27 specifies the response packet sent by the camera on receive of a discovery packet. Its length is 112 (0x70) bytes. Note the result codes are identical to the Control Interface, see Chapter 3.1.2.

Addr	Field	Format	Value	Description
00	Preamble (high-byte first)	UInt16	0xa1ec	Unique identifier, start of header
02	ProtocolVersion	UInt8	3	Version: V3.0
03	Command	UInt8	253	Command code for discovery
04	SubCommand	UInt8	<subcommand code>	SubCommand code of the original command sent
05	Status	UInt8	As defined in Table 5	Result code
06	Flags	UInt16		[Bit 0] 1..Ignore DataCrc32
08	Length (high-byte first)	UInt32	N	length of <Data> in bytes
0C	HeaderData0 (high-byte) HeaderData1 (lowbyte)	UInt16	<header data 0/1>	Same as in sent command
0E	HeaderData2	UInt8	<header data 2>	Same as in sent command
0F	HeaderData3	UInt8	<header data 3>	Same as in sent command
10	Reserved (42 bytes)	UInt8[]	<reserved data>	Same as in sent command
3A	DataCrc32	UInt32		Checksum over <Data>
3E	HeaderCrc16	UInt16		Checksum over 60 bytes of Header: 0x02 – 0x3D
40	DeviceMAC	6*UInt8		
46	DevicelpVersion	UInt8	4	4: IPv4
47	Devicelp	UInt32		
4B	SubnetMask	UInt32		
4F	GatewayIp	UInt32		
53	UdpStreamIpVersion	UInt8	4	4: IPv4
54	UdpStreamIP	UInt32		
58	UdpStreamPort	UInt16		
5A	UdpConfigPort	UInt16		
5C	TcpStreamPort	UInt16		
5E	TcpConfigPort	UInt16		
60	DeviceType	UInt16		Content of register DeviceType
62	DeviceSerialNumber	UInt32		Content of registers SerialNrLow and SerialNumberHigh



Addr	Field	Format	Value	Description
66	DeviceUptime	UInt32		Content of registers UptimeLow and UptimeHigh
6A	Mode0Register	UInt16		Content of register Mode0
6C	StatusRegister	UInt16		Content of register Status
6E	FirmwareVersion	UInt16		Content of register FirmwareInfo

Table 27: Discovery response packet specification

### 3.4 Manual frame triggers

The default mode of the Argos is video mode, where the camera streams continuously with configured frame rate. To use manual frame triggering, the video mode must be disabled in register **Mode0**.

A frame can be triggered by either

- Hardware trigger: The signal is sensitive to a falling edge, or
- Software trigger: See register **Mode0**.

Both will trigger the capturing of as many sequences on the ToF sensor, as is configured in register **NofSequ**, as well as a transition to low on the trigger output.

If color data is transferred via the data interface, the color sensor operates at either 15 or 30 frames per second in the background (depending on register settings in **ColorStreamParams**). A color image is assigned to each captured ToF image by means of both internal capture timestamps. If no color image is available (e.g., during reconfiguration of the color sensor), an empty color image is transferred.

### 3.5 External Illumination Interface

Please contact Bluetechnix support for information about the external illumination interface.

### 3.6 GPIOs

The camera features 2 general-purpose inputs and 4 general-purpose outputs. Please see the register description in chapter 5.2 for more information.

### 3.7 Status Indicator LED

The Argos 3D-P320 camera features an RGB LED to indicate its internal status via different colors:

- Green: No error condition detected
- Yellow: Calibration data is missing
- Red: The input voltage is outside the required range (18-29V)
- Red blinking (ca. 1 Hz): Error condition detected, please consult **Status** register.

### 3.8 PoE power control

If the camera is powered via a PoE connection (and not via VAUX), the firmware is able to detect the PoE power class it is currently connected to.



It will automatically adjust its current consumption to the maximum allowed power.

The following classes can be detected (see register **PoEStatus**):

Power class	Max. allowed power	Action
PoE	13 W	Power limitation to 13 W <sup>1)</sup>
PoE+	25.5 W	Power limitation to 25.5 W
PoE++	not specified	No power limitation
VAUX supply	not specified	No power limitation

Table 28: Supported power supplies

Note 1): PoE mode does not allow for any illumination, so there is no reasonable usage of the camera with this power supply.

The power is limited by limiting the max. allowed FITP (Frame rate-Integration Time-Product), i.e., by limiting either the frame rate or the integration time (or both). Please see chapter 4.9 for details.

The detected PoE class can be overridden by means of register **PoEOverride**.

## 3.9 Secure Shell (SSH) Login

The Argos 3D-P320 camera features an OpenSSH server listening to TCP port 22.

	Root account	User account
Username	root	user
Default password	root	user

Table 29: Default login credentials

### 3.9.1 Change default password

#### Change default password

1. Log in via SSH, e.g., `ssh root@192.168.0.10`
2. Type `passwd root` or `passwd user`
3. Supply the new password for two times
4. Copy the file `/etc/shadow` (containing the encrypted passwords) to the non-volatile settings partition, to be restored again on next camera reboot: `cp /etc/shadow /mnt/settings`

## 3.10 Debug UART

### Note



Using the Debug UART is optional.

The Argos 3D-P320 features a debug UART, which is the primary debug interface for the boot loader as well as the Linux kernel.

The Debug UART is available via a micro-USB-connector, with a UART-to-USB converter behind. To be able to access the serial terminal via the Debug UART, you need an appropriate driver installed in your OS for the FTDI FT234 device.



## Windows OS Device Driver Download

 <http://www.ftdichip.com/Drivers/VCP.htm>

Most Linux distributions come with an appropriate driver and create a device node `/dev/ttyUSB...` dynamically.

Additionally, one needs a serial terminal emulator, e.g., Minicom or C-Kermit for Linux, or TeraTerm for Windows OS. The emulator has to be configured with the following settings:

Baud rate	115200
Data bits	8
Parity	none
Stop bits	1
Flow control	none

Table 30: Debug UART settings

The Debug UART also allows to log in to the camera's Linux OS. Please see chapter 3.9 for the default login and how to change it.



## **4 Camera Features**

### **4.1 Basic Settings**

The Argos comes up according to the reset (default) values as described in the register description chapter (refer to chapter 6).

Each camera has been pre-configured with a factory-default register map.

### **4.2 ToF Image Processing Chain**

The following flow diagram shows the image processing chain of the Argos for the ToF sensor data. Filters can be applied individually to distance and amplitude data. XYZ point cloud data is calculated from distance data on demand.



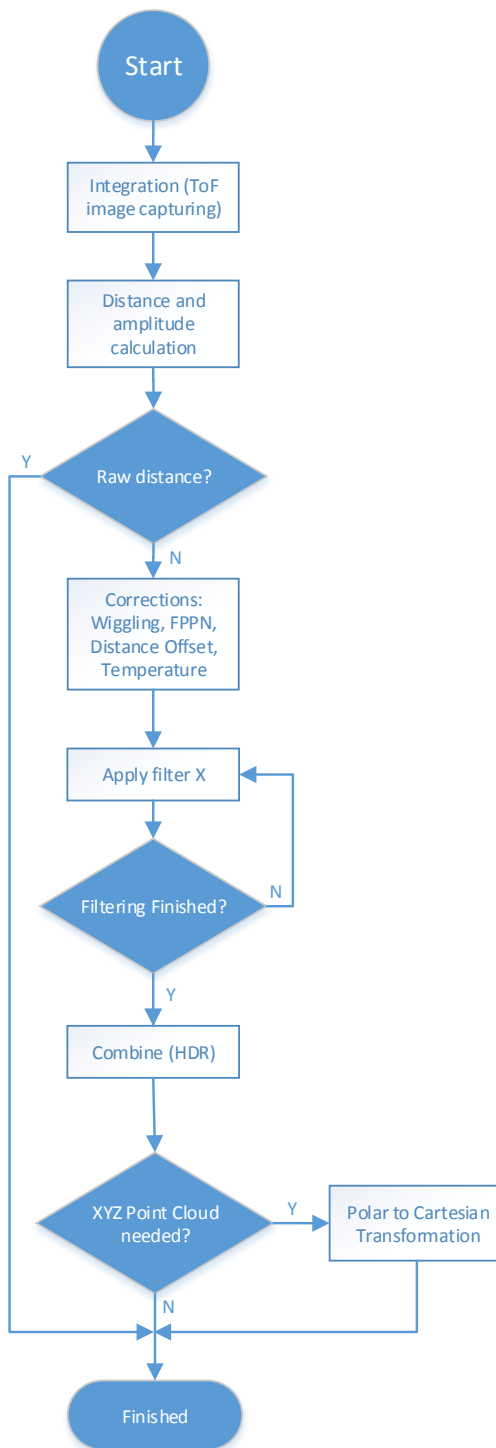


Figure 4-1: Image processing flow

### 4.3 ToF Image Filters

After the distance and amplitude calculation, filters can be applied to the distance and amplitude data. Each of the filters provides one or more configuration parameters. The iteration count for each filter can also be configured. The filters can be enabled or disabled by writing the **ImgProcConfig** (distance data) and



**ImgProcConfig2** (amplitude data) registers. Enabling more than one filter is possible but each added filter reduces the maximum achievable frame rate (as does the number of iterations).

The filters are applied in the following order:

1. Frame Average filter
2. Sliding Average filter
3. Average filter
4. Median filter
5. Bilateral filter

Note that the Frame Average filter for amplitude data can only be enabled if the Frame Average filter is enabled for distance data.

#### 4.3.1 Median Filter

A 3x3 median filter can be applied.

Register: **FilterMedianConfig**

The number of iterations is configurable.

#### 4.3.2 Bilateral filter

Registers: **FilterBilateralConfig**, **FilterBilateralConfig2**

Configuration options are  $\sigma_R$  (Width of range kernel),  $\sigma_S$  (Width of spatial kernel), number of iterations, and window size.

#### 4.3.3 Average filter

Registers: **FilterAverageConfig**

Note: Currently this filter supports only a filter size of 2.

#### 4.3.4 Sliding Average Filter

Register: **FilterSLAFconfig**

A sliding average filter over up to 255 frames can be applied. The number of frames is configurable. An increasing number of frames will not decrease the frame rate but may add blurring effects.

#### 4.3.5 Frame Average Filter

Register: **FilterFrameAverageConfig**

A frame average filter over up to 255 frames can be applied. The number of frames is configurable.



The frame rate of the data interface will be divided by the number of configured frames to be averaged, e.g., if the camera is configured to 40 frames per second, and the frame average filter with number 4 is used, the resulting output frame rate will be 10.

Note that the Frame Average filter on amplitude data cannot be enabled unless the Frame Average filter on distance data is also enabled.

## 4.4 ToF Image Enhancements

### 4.4.1 Pixel invalidation

The Argos 3D-P320 provides an on-board check for invalid pixels:

- Underexposed pixels: The amplitude is too low for the distance value to be trustworthy. The Argos 3D-P320 sets the pixel distance to the maximum value. The threshold is set via register **ConfidenceThresLow**.
- Overexposed pixels: The amplitude is too high for the distance value to be trustworthy. The Argos 3D-P320 sets the pixel distance to the minimum value. The threshold is set via register **ConfidenceThresHigh**.
- Invalid pixels: The Argos 3D-P320 features an additional amplitude check called ACF (auto correlation function) Plausibility Check. It detects inconsistent pixels e.g. in case of fast movement in the scene.

#### 4.4.1.1 Distance values

If the amplitude of the reflected signal is below a threshold (underexposure) the distance value of the appropriate pixel will be set to 0xFFFF. If the amplitude is too high (overexposure) the distance value will be set to 0x0000.

For invalid pixels, the distance value is set to 0x0001.

#### 4.4.1.2 XYZ values

If the amplitude of the reflected signal is below a threshold (underexposure) the X value of the appropriate pixel is set to 32767 (0x7FFF), i.e., the largest positive Int16 value. Y and Z values are set to 0.

If the amplitude of the reflected signal is above a threshold (overexposure) the X of the appropriate pixel is set to 0. Y and Z values are set to 0 as well.

If the ACF plausibility check classified the pixel's distance as invalid, the X value of the appropriate pixel is set to 1. Y and Z values are set to 0.

### 4.4.2 Temperature compensation

The camera firmware continuously monitors temperatures of LIMs, TIM, and base board, and corrects the measured distance with cubic polynomials.



### 4.4.3 Combine sequences (HDR)

In order to improve the accuracy of distance data, the camera features the ability to combine 2 frames from the ToF sensor into one frame with improved accuracy. It uses the confidence values of the 2 input frames to calculate a new distance value for each pixel of the output frame.

The following registers are used to configure Combine mode:

- ***NofSequ***: To configure 2 sequences
- ***IntegrationTime*, *IntTimeSeq1***: To configure integration times of the 2 sequences. It is recommended to set *IntegrationTime* to a value higher than the value of *IntTimeSeq1*.
- ***ModulationFrequency*, *ModFreqSeq1***: To configure modulation frequencies of the 2 sequences
- ***ImgProcAdvanced***, bit 0: To enable combine mode

## 4.5 Camera Coordinate System

The camera coordinate system is depicted in Figure 4-2.

Pixel numbering starts in the upper left corner of the pixel array, seen from the camera's point of view.

Distance data always contains the measured distance from the ToF sensor to the viewed scene.

Point cloud data contains X, Y and Z coordinates for each ToF pixel. Point cloud data is calculated via intrinsic lens parameters for the ToF sensor and optical system, and via extrinsic parameters. The reference point of the camera coordinate system, where  $X=Y=Z=0$ , is the front-bottom-left edge of the camera, seen from the camera's point of view.

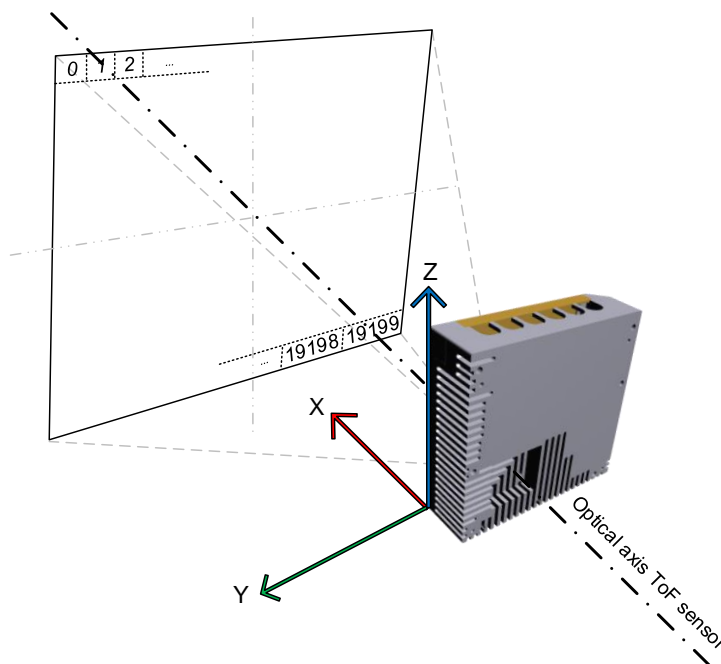


Figure 4-2: Argos 3D-P320 Default Coordinate System



**Note**

If you are working with a *BltTofApi* library, or the *BltTofSuite*, the camera coordinate system is automatically converted. Please refer to *BltTofApi* documentation for the coordinate system (See chapter 8).

For point cloud calculation, the camera requires proper calibration files (Lens calibration, Geometric Model Parameters). These calibrations are identified by the **HardwareConfiguration** identifier (register). To check for proper calibration, registers **CalibStatus** and **CalibStatus2** may be read.

## 4.6 Color Overlay

The Argos 3D-P320 features a color sensor additionally to the ToF sensor. It is able to generate an RGB565 color map that assigns each ToF pixel a corresponding color value from the color sensor. In order to accomplish the mapping, the camera calculates the XYZ point cloud first, and then projects each of these points back to the color sensor array to determine the correct color. Hidden areas are detected by means of ray-tracing, in which case no color or a special color can be assigned (configurable).

### 4.6.1 Camera Settings

Your camera is delivered fully calibrated for Overlay mode. To select the overlay image data format, please consult chapter 4.7.8. If you wish to upgrade a camera, please consult Bluetechnix Support for an offer.

For overlay mode, the camera needs certain calibration data which is stored in non-volatile RAM. You can check for these by means of status register bits:

- Lens calibration: Register **CalibStatus**
- Geometric model parameters: Register **CalibStatus2**
- Overlay calibration: Register **CalibStatus2**

The calibration data is identified by means of two registers:

- **HardwareConfiguration**: Identifier for ToF optical system (We often use the vertical opening angle as identifier).
- **HardwareConfigColor**: Identifier for color sensor optical system (We often use the vertical opening angle as identifier).

Color sensor parameters must be configured using register **ColorStreamParams**. Note that the data format has to be RGB565 and the resolution has to be 320x240 (QVGA). The frame rate may be chosen between 15 or 30 fps.

Overlay mode is enabled by selecting mode 5 in register **ImageDataFormat**.

**Note**

If the camera continues to send distance and amplitude data, and you read the **ImageDataFormat** back as 0, then any of the color sensor configuration is not suitable for this mode, or calibration data is missing (**HardwareConfig** and **HardwareConfigColor** values inappropriate).



Also, if you change any setting while running in overlay mode, that makes the overlay calculation impossible, the camera switches to image data format 0 by itself.

## 4.6.2 Configuration

There are certain configuration options for the overlay mode:

- Invalidate point cloud points where color assignment is not possible: Register **OverlayConfig**  
A usual scene always contains points that e.g. have invalid depth data, are hidden from the color sensor, etc. In the default setting, these points are marked “invalid” in the X coordinate array, i.e., with value 0x1 (confer to chapter 4.4.1.2).
- Ray-tracing threshold: Register **OverlayVectorLengthThreshold**  
To determine if an XYZ point is visible from the color sensor, the camera uses a ray-tracing algorithm. This threshold in millimeters allows to adjust the strictness of the algorithm.
- Default color values if assignment from color sensor is not possible: Registers **OverlayColorInvalidDepth**, **OverlayColorNotCalibrated**, **OverlayColorOutside**, **OverlayColorNoMapping**, **OverlayColorHidden**  
RGB565 color values that are filled into the color array if a color assignment is not possible for a point.

## 4.7 Camera Data Format

The camera provides up to four data channels via its data interface. The meaning of each data channel depends on the selected data format. The factory default setting provides an array of distance data and an array of amplitude data.

A 3D XYZ point cloud can be provided by the camera. Refer to chapter 4.4 for a description of the coordinate system of the camera.

### Note



Data formats with XYZ point clouds cannot be enabled if there is no proper lens calibration data stored on the camera. Please use register **HardwareConfig** to configure the ToF lens calibration hardware identifier and register **CalibStatus** to read the status of lens calibration availability.

Color data from the CMOS image sensor can also be selected.

A channel can carry one of the following data types:

- Distance data from the ToF sensor, in millimeters, as 16-bit unsigned (UInt16) values. Resolution is always 160x120 pixels.
- Amplitude data from the ToF sensor, as 16-bit unsigned (UInt16) values. Resolution is always 160x120 pixels.
- Confidence data, as 8-bit unsigned values. Resolution is always 160x120 pixels.



- X coordinate values, in millimeters, as 16-bit signed (Int16) values. No negative values allowed. Resolution is always 160x120.
- Y coordinate values, in millimeters, as 16-bit signed (Int16) values. Resolution is always 160x120.
- Z coordinate values: Same as Y.
- Raw depth data (without scaling, corrections and filters), as 16-bit unsigned (UInt16) values. Resolution is always 160x120 pixels.
- Raw phase data (0°, 90°, 180°, 270°), as 16-bit unsigned (UInt16) values. Resolution is always 160x120 pixels.
- Color sensor data in RGB565 format (16 bits per pixel). The resolution is set via register **ColorStreamParams**. The format is depicted in Table 31. Note that from one color value, B0, G0, and R0 are the least significant bits. B4, G5, and R4 are the most significant bits.
- Color sensor data in JPEG format. The resolution is set via register **ColorStreamParams**, as is the selection of JPEG instead of RGB565 format.
- Overlay color data: Each point of the XYZ point cloud, measured by the ToF sensor, gets assigned a color value from the color sensor by means of back-projection and ray-tracing to the color sensor. The color format is always RGB565.



Table 31: RGB565 format

Which image format will be transferred can be selected by the register **ImageDataFormat**. The following sections describe each of the supported formats in detail. Only the data section which contains the image data of the transferred frame will be described. For information about the packet format and meta-data please refer to chapter 3.2.

### 4.7.1 Distances and Amplitudes

In this mode the distances and amplitudes will be transferred in progressive mode, first the distance array (channel 0), then the amplitude array (channel 1). The stream starts always with pixel #0.

The **distances** are coded in **millimeters** as **UInt16**, the **amplitudes** also as **UInt16**.



First Byte in Stream

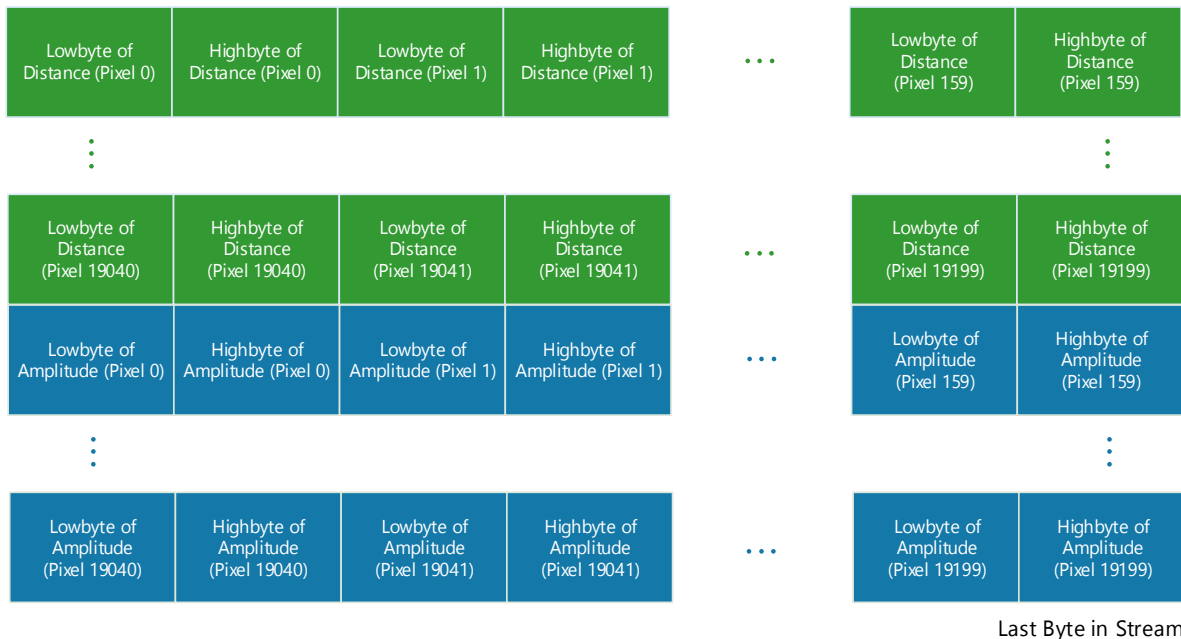


Figure 4-3: Data stream of Distance and Amplitude data

## 4.7.2 Distances, Amplitudes and Color

In this mode distances and amplitudes from the ToF sensor, as well as the color sensor image will be transferred in progressive mode, first the distance array (channel 0), then the amplitude array (channel 1), then the color sensor data (channel 2). The stream starts always with pixel #0.

The **distances** are coded in **millimeters** as **Uint16**, the **amplitudes** also as **Uint16**. The **color** sensor pixels are coded in **RGB565** (raw) or **JPEG** compressed format.

The resolution, format, and frame rate of the color sensor are set via register **ColorStreamParams**.

Channel 2 (which carries the color data) may have zero length, if no color data is available for the current frame. In this case, fields *ColorSensorWidth*, *ColorSensorHeight*, and *ColorSensorLength* of the frame header are set to zero (refer to section 3.2.2).


In the case the color data is transferred in JPEG format, frame header field *ColorSensorLength* contains the length of the JPEG-compressed image in bytes.







First Byte in Stream

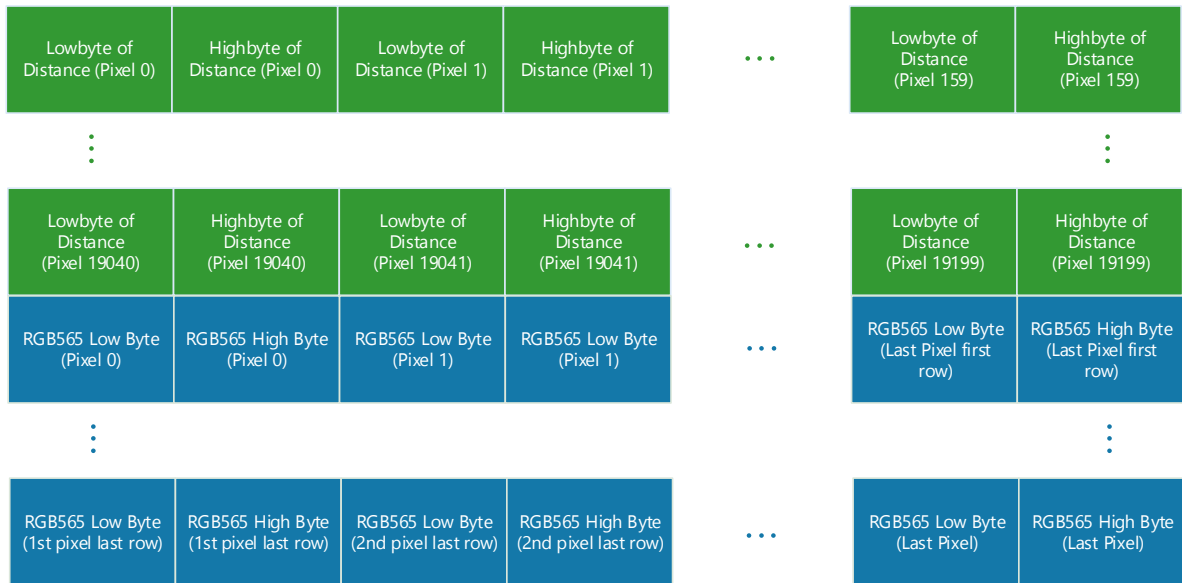

Last Byte in Stream

Figure 4-5: Data stream of distance and RGB565 data


#### 4.7.4 XYZ Point Cloud

In this mode the XYZ point cloud will be transferred in progressive mode, first the X coordinate array (channel 0) then the Y (channel 1) and Z (channel 2) coordinate array. The stream starts always with pixel #0.

The **coordinates** are coded in **millimeters** as **Int16**.



First Byte in Stream

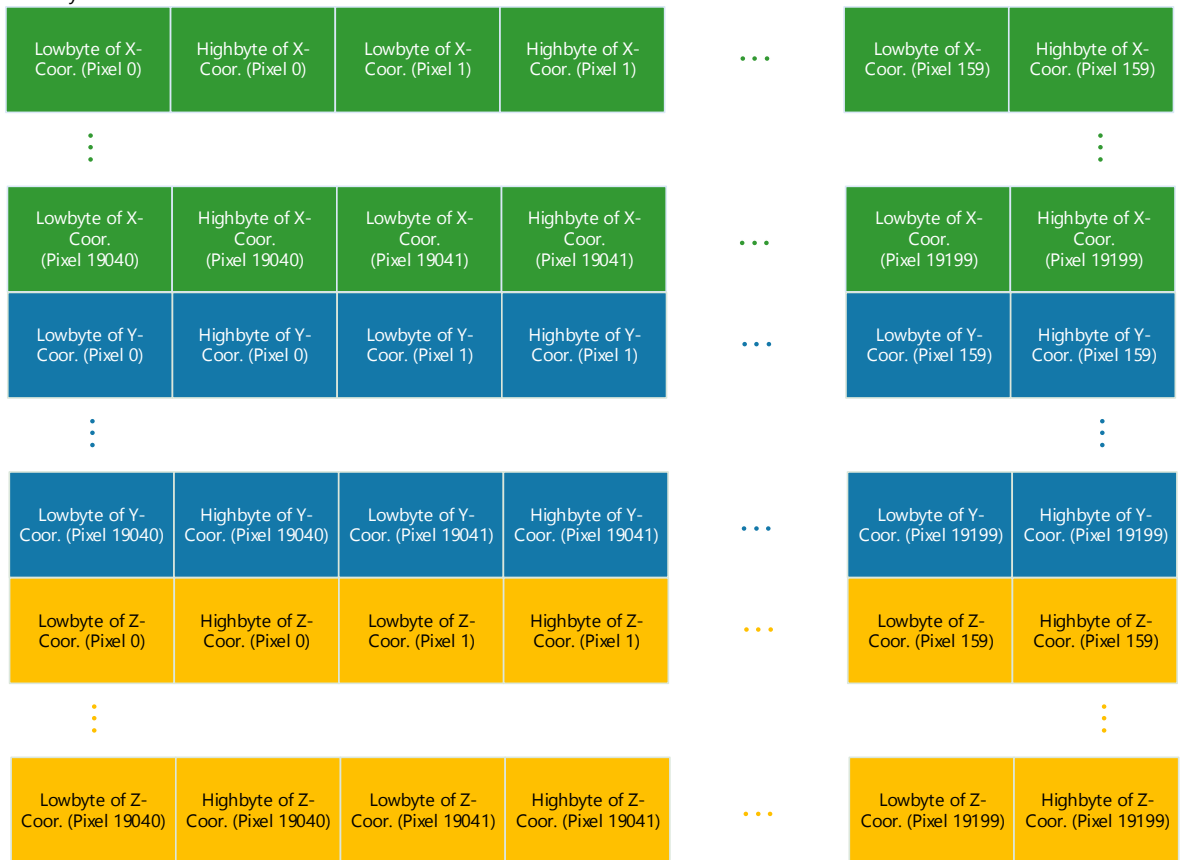

Last Byte in Stream

Figure 4-6: Data stream of XYZ Point Cloud


### 4.7.5 XYZ Point Cloud and Amplitudes

In this mode the XYZ point cloud and the amplitude will be transferred in progressive mode, first the X coordinate array (channel 0), then the Y (channel 1) and Z (channel 2) coordinate array, then the amplitude array (channel 3). The stream starts always with pixel #0.

The **coordinates** are coded in **millimeters** as **Int16** the **amplitudes** as **Uint16**.



First Byte in Stream

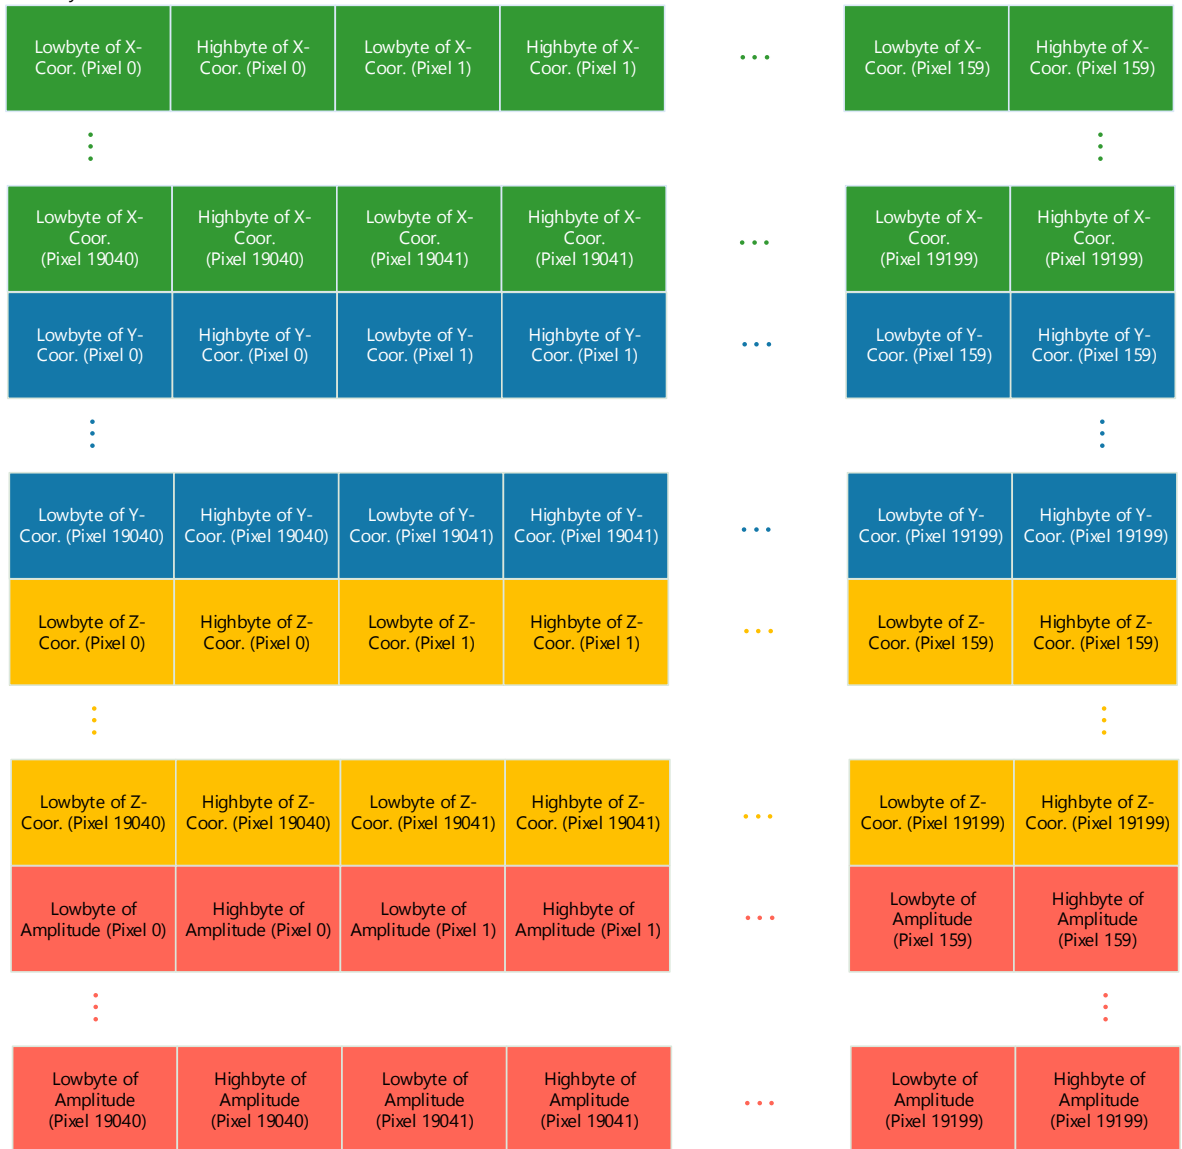

Last Byte in Stream

Figure 4-7: Data stream of XYZ Point Cloud and Amplitude

#### 4.7.6 Distances and XYZ Point Cloud

In this mode the distances and the XYZ point cloud will be transferred in progressive mode, first the distances array (channel 0), then X (channel 1), Y (channel 2), and Z (channel 3) coordinate arrays. The stream starts always with pixel #0.

The **distances** are coded in millimeters as Uint16. The **coordinates** are coded in **millimeters** as Int16.

#### 4.7.7 X Coordinate and Amplitudes

In this mode a single coordinate array, more specifically, the one belonging to the optical axis of the camera (X), is transferred in channel 0, as well as the amplitudes (channel 1).



**Coordinate** values are coded in **millimeters** as **Int16**. The **amplitudes** are coded as **UInt16**.

#### 4.7.8 XYZ Point Cloud and Color (Overlay)

In this mode XYZ point cloud data and matching color values will be transferred in progressive mode, first the X array (channel 0), then Y (channel 1), Z (channel 2), and RGB565 color array (channel 3). The stream starts always with pixel #0.

The **coordinates** are coded in **millimeters** as **Int16**. The color array contains RGB565 values only.

Please consult chapter 4.6 for proper configuration of this mode.

#### 4.7.9 Distances

In this mode a single array with distances is transferred in channel 0. The stream starts always with pixel #0.

The **distances** are coded in **millimeters** as **UInt16**.

#### 4.7.10 4 phases without image processing

In this mode the 4 phases (0°, 90°, 180° and 270°) will be transferred in progressive mode, as 16-bit unsigned (UInt16) values

#### 4.7.11 Test mode

In this mode four arrays with test data are transferred in progressive order.

- Channel 0: UInt16 value = Pixel Index
- Channel 1: UInt16 value always constant '0xbeef'
- Channel 2: UInt16 value = (Pixel Index)<sup>2</sup>
- Channel 3: UInt16 value always constant '0x0000'

#### 4.7.12 Raw Distances and Amplitudes

In this mode, raw distance values are transferred in channel 0, and amplitude values are transferred in channel 1.

Raw distance values are forwarded as retrieved from the TIM. No conversion to millimeters and no corrections are performed on the values. Filter settings for raw distance values are ignored as well.

#### 4.7.13 Distance, Amplitudes, and Confidences

In this mode, the distances, amplitudes, and confidences will be transferred in progressive mode, first the distance array (channel 0), then the amplitude array (channel 1) and confidence array (channel 2). The stream starts always with pixel #0.

The **distances** are coded in **millimeters** as **UInt16**. The **amplitudes** pixels are in **UInt16** format. The **confidence** pixels are in UInt8 format.



The confidence is a measure of the confidence of the corresponding depth value. A value of 255 (maximum value) means 100% confidence, whereas a value of 0 (minimum value) means a confidence of 0%.

First Byte in Stream



Last Byte in Stream

Figure 8: Data stream of Distances, Amplitudes, and Confidences

#### 4.7.14 Distances, Amplitudes, Confidences, and Color

In this mode distances and amplitudes from the ToF sensor, confidence values, as well as the color sensor image will be transferred in progressive mode, first the distance array (channel 0), then the amplitude array (channel 1), then the confidence array (channel 2), then the color sensor data (channel 3). The stream starts always with pixel #0.

The **distances** are coded in **millimeters** as **UInt16**, the **amplitudes** also as **UInt16**. The confidence values are in **UInt8** format. The **color** sensor pixels are coded in **RGB565** (raw) or **JPEG** compressed format.

The resolution, format, and frame rate of the color sensor are set via register **ColorStreamParams**.

Channel 3 (which carries the color data) may have zero length, if no color data is available for the current frame. In this case, fields *ColorSensorWidth*, *ColorSensorHeight*, and *ColorSensorLength* of the frame header are set to zero (refer to section 3.2.2).



In the case the color data is transferred in JPEG format, frame header field *ColorSensorLength* contains the length of the JPEG-compressed image in bytes.

#### 4.7.15 Color

This data format is only used for the UDP Color Sensor Stream (see chapter 4.16.1 for more information). This data format cannot be set via register **ImageDataFormat**. When this data format is transferred, field *ImageFormat* of the frame header (→ chapter 3.2.2) is set to value 22 (0x16).

In this mode the color sensor image is transferred in channel #0. The **color** sensor pixels are coded in **RGB565** (raw) or **JPEG** compressed format. In the case the color data is transferred in JPEG format, frame header field *ColorSensorLength* contains the length of the JPEG-compressed image in bytes.

The resolution, format, and frame rate of the color sensor are configured via register **ColorStreamParams**.

### 4.8 ToF Modulation Frequency

The modulation frequency of the illumination is set to 20 MHz per default. Other modulation frequencies can be set using the register **ModulationFrequency** (for sequence 1: **ModFreqSeq1**). Be aware that this also changes the ambiguity range of the camera.

The following modulation frequencies can be selected:

Index	Frequency
0	5 MHz
1	7.5 MHz
2	10 MHz
3	15 MHz
4	20 MHz
5	25 MHz
6	30 MHz

Table 32: Pre-defined modulation frequencies

The register can be written with the frequency in 10-kHz-steps (frequency in Hz/10000) or the index. On a register read, the currently selected modulation frequency (again, in 10-kHz-steps), is returned.

Other frequencies between 5 MHz and 30 MHz can be set as well, but as there is no calibration data available for other frequencies than the indexed ones it may result in unpredictable distance values.

### 4.9 Frame Rate and Integration Time

The frame rate and the integration time of the ToF sensor can be set by using the registers **Framerate** and **IntegrationTime** (for sequence 1: **IntTimeSeq1**). The ToF sensor's integration time is limited by hardware to 24ms.

The color sensor is operating at ca. 15 or ca. 30 frames per second (as configured in register **ColorStreamParams**).

The maximum frame rate for the ToF sensor is 160 fps but may be reduced by increasing its integration time. The combination of frame rate and integration time influences the input current as well as the dissipated heat



and will be characterized by the “*Frame rate Integration Time Product*” (FITP) which has been defined as follows:

$$FITP = t_{INT} [ms] \cdot fps \left[ \frac{1}{s} \right] \cdot 4$$



#### Caution

Be careful in setting different integration times and frame rate combinations. Not all combinations are possible! Without appropriate cooling the device may be damaged! Refer to the Hardware User Manual for more information.

The FITP is also used for the camera’s power control, if it is powered by PoE (see chapter 3.6). If the camera register **Integration Time** or **Framerate** is modified, the entered value is used to calculate the FITP. Should the FITP violate the maximum allowed power, then the value is automatically corrected before it is applied. The corrected value can be read back via the same register. Also, if any correction of integration time or frame rate took place because of PoE constraints, Bit[10] of the **Status** register will be set.

## 4.10 Sequencing

The Argos 3D-P320 allows the configuration of up to 2 sequences on the TIM. These sequences are captured immediately after each other by the TIM. Each sequence can be configured with individual integration time and modulation frequency.

If the camera’s video mode is disabled (see register **Mode0**), and the camera is manually triggered, each trigger will generate as many sequences as currently configured.

The number of sequences can be configured in register **NofSequ**.

For sequence 0, use registers **IntegrationTime** and **ModulationFrequency** to set integration time and modulation frequency, respectively.

For sequence 1, use registers **IntTimeSeq1** and **ModFreqSeq1**.

Each sequence is processed and streamed by the camera as one individual frame. Each frame header contains the sequence number in field *SequenceNumber*.

## 4.11 Illumination Pre-Heating

The camera supports pre-heating of the LEDs on the LIMs immediately before capturing. Pre-heating is accomplished by applying a defined modulation signal to the LEDs.

Pre-heating is enabled by setting a pre-heating time. For each sequence, an individual pre-heating time can be configured.

Sequence 0 pre-heating time is configured in register **IIIPreheatingTime**.

Sequence 1 pre-heating time is configured in register **IIIPreheatingTimeSeq1**.

Common parameters for pre-heating are the frequency of the modulation signal (register **IIIPreheatingFreq**) and the duty cycle of the modulation signal (register **IIIPreheatingDutyCycle**).



## 4.12 Distance Offset Calibration

Each Argos 3D-P320 is offset-calibrated out of factory.

For each pre-defined modulation frequency, there is an absolute offset in millimeters that all distance values are corrected with. The absolute offsets are stored in registers **DistOffset0** (for 5 MHz modulation frequency) to **DistOffset6** (for 30 MHz). Offsets can be modified by direct register writes.

Distance Offset correction is enabled or disabled in register **ImgProcConfig**.

The camera has also a built-in offset calibration function, which is described in the following procedure. You let the camera know the real distance and the camera will calculate the correct absolute offset. It uses a square of 4x4 pixels in the center of the distance image.

### Procedure

#### Offset Calibration

1. Place your Argos co-planar in front of a uniform white target.
2. Avoid extreme environmental light conditions or avoid light completely.
3. Set the desired modulation frequency using register **ModulationFrequency**.
4. Check the amplitude in the center of the image and increase/decrease the **IntegrationTime** until the amplitude is about 3000-5000 in the center.
5. Measure the real distance in millimeters from the camera to the white target. Write this value into register **RealWorldXCoordinate**.
6. Write decimal value 19 into register **CalibrationCommand** and wait until the **CalibStatus** register, Bits 0..7, read decimal value 161 (= finished).
  - The appropriate **DistOffsetX** register is updated.
7. If you want to keep the setting, don't forget to save registers to flash (Chapter 4.16.2).


## 4.13 ToF Automatic Exposure Control (AEC)

The Argos 3D-P320 provides an automatic exposure control feature which controls the integration time according to the currently observed scene. The AEC is disabled by default and must be enabled in the register **Mode1**.

The AEC is controlled through dedicated registers, which are listed in chapter 5.5.

The AEC algorithm also supports weighing. One may assign specific weights to each of 25 areas into which the sensor area is divided. These weights are inputs to calculate the current amplitude. Please see Figure 4-9: AEC weighing areas for an illustration. Each area's weight is a Uint8 value and can range from 0% (0x0) to 100% (0xf).



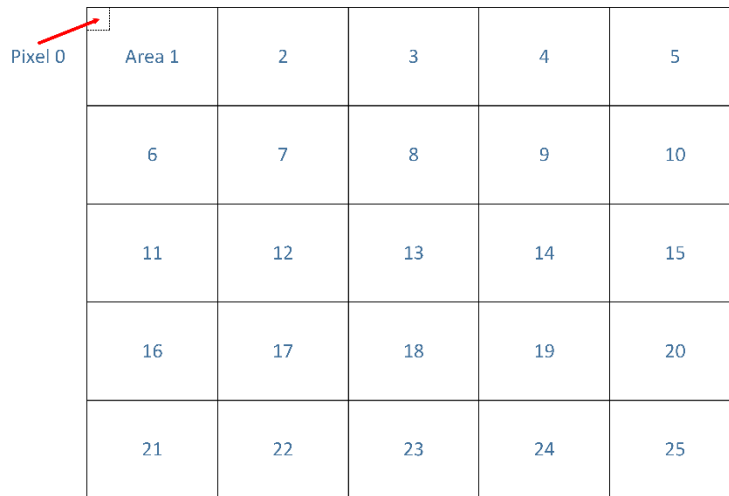

Area 1	2	3	4	5
6	7	8	9	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

Figure 4-9: AEC weighing areas

The AEC regulates the integration time of each sequence individually. AEC settings are common for all sequences.

## 4.14 Manual Frame Trigger

There are two types of manual trigger. To enable the manual trigger, the video mode must be disabled in register **Mode0**, Bit[0].

A manual trigger will start capturing of as many sequences as currently configured in register **NofSequ**.

### 4.14.1 Hardware Trigger

The camera provides an extension connector where a hardware trigger can be applied. Please refer to 3.4 for more information.

### 4.14.2 Software Trigger

In addition to the hardware trigger a software trigger is available. To start a frame capturing by software, set the appropriate bit (Bit[4]) in register **Mode0**.

### 4.14.3 ToF Snapshot Function

The camera features a snapshot function which produces exactly one frame with averaged distance (and optionally, amplitude) data per snapshot request. The camera's video mode must be disabled (no continuous streaming). On a snapshot request, the camera is collecting frames from the ToF sensor until the Frame Average filter is able to produce an averaged frame (which depends on filter settings), after which the ToF sensor is stopped again.

In case more than 1 sequences are configured (register **NofSequ**), one frame is produced for each sequence per snapshot request.

Follow these instructions to use the snapshot function:

- Disable video mode in register **Mode0**.



- Enable the Frame Average filter for distance data in register **ImgProcConfig**.
- Optionally, enable also the Frame Average filter for amplitude data in register **ImgProcConfig2**.
- Configure the number of frames to be averaged in register **FilterFrameAverageConfig**.
- Request a new snapshot by setting the corresponding bit in register **Mode0**. (The bit is self-clearing.)

## 4.15 Over Temperature Protection

The Argos 3D-P320 firmware has a built-in monitoring for over-temperature condition of the LIMs. If the LIM temperature exceeds 70°C, the camera will automatically stop illumination and streaming, until temperature is below 68°C.

During over-temperature condition, bit 9 of the **Status** register is set.

The maximum allowed temperature for the LEDs can be changed in register **MaxLedTemp**. However, we do not recommend to set values larger than 70°C, because it drastically reduces the lifetime of the LEDs.

## 4.16 Color Sensor

Data from the color sensor can be transmitted in two different ways:

1. **Color channel**: Send color data as part of the data streaming protocol, along with data from the ToF sensor. Select an appropriate mode in register **ImageDataFormat**. Select resolution, data format (RGB565 or JPEG compressed), and frame rate of the color sensor in register **ColorStreamParams**.
2. **UDP Color Sensor Stream**: Send color data with the data streaming protocol, but independent from ToF sensor data. A separate destination IP address and destination UDP port can be configured.

Note that these modes may operate concurrently.

See Table 33 for a list of available resolutions/frame rates.

Resolution	Frame rates	Horiz. Opening Angle <sup>1)</sup>	Vert. Opening Angle <sup>1)</sup>
176x144	15, 30	TBD	TBD
320x240	15, 30	103°	77°
640x480	15, 30	103°	77°
720x480	15, 30	103°	69°
720x576	15, 30	95°	76°
1024x768	15, 30	TBD	TBD
1280x720	15, 30	103°	58°
1920x1080	15, 30 <sup>2)</sup>	74°	42°

Table 33: Color sensor resolution and frame rate options, plus opening angles

Note 1. The specified opening angles are approximate values only. They are valid only with the default lens. Please consult the Hardware User Manual for details.

Note 2. Depending on the camera's configuration, the maximum value may not be reached.

The pixel orientation of the color image sensor is identical to Figure 4-2.



### 4.16.1 UDP Color Sensor Stream

In use cases where a continuous color sensor stream is required, but only sporadic ToF sensor images, the camera features a second UDP stream that is dedicated to send color sensor data only. It is compliant to the data interface format in chapter 3.2 and hence compatible to tools and libraries provided by Bluetechnix.

The UDP color sensor stream is enabled in register **ColorStreamParams**, bit 2. The resolution, frame rate, and data format (raw RGB565 or JPEG compressed) can also be configured with this register.

The destination for this stream can be configured independently of the ToF data stream, using the following registers:

- Use registers **Eth0UdpColorStreamIp0**, **Eth0UdpColorStreamIp1** to set the destination IP address.
- Use register **Eth0UdpColorStreamPort** to set the destination UDP port.

### 4.16.2 Color Sensor Control

The color sensor features automatic exposure and gain control (AEC/AGC) and automatic white balance (AWB). By default, these are switched on.

These features can be controlled via register **ColorSensorControl**. Switching off AEC/AGC and/or AWB means that the sensor freezes the current values for exposure, gain, and white balance.

In case the AEC/AGC feature is switched off, the sensor's exposure can be controlled via register **ColorSensorExposure**, and the gain can be set in register **ColorSensorGain**. Reading from these registers return the current values of the sensor (also in AEC/AGC on mode), or the last user-defined registers, if the color sensor is not operating currently.

## 4.17 Save Registers

The entire register map can be saved into non-volatile flash using the register **CmdExec**. It will be restored from flash after a reboot or power cycle. Use this feature to save a user specific configuration.

After camera boot, one may query a ready bit which indicates that all the settings have been applied within the camera: Bit 1 of register **Ready**.

## 4.18 Ethernet/IP Settings

### 4.18.1 MAC Address

A dedicated Ethernet MAC address from Bluetechnix MAC address pool is assigned to each Argos by factory default. This MAC address is saved in the OTP and cannot be changed by the user.

The user is allowed to assign the Argos another MAC address using the registers **Eth0Mac0** to **Eth0Mac2**. Be aware that in order to make the changes persistent, the register map must be saved to flash using register **CmdExec**, otherwise the changes will be lost on a reboot or power cycle.

If the register map in the flash will be cleared the factory default MAC address from OTP will be loaded.



### 4.18.2 IP/TCP/UDP Settings

The IP Settings of the Argos can be changes via the **Eth0\_\*** registers. A change of the IP settings (IP address, subnet mask, default gateway) will take effect on writing the latter one. Port settings will take effect immediately. UDP destination IP addresses will take effect immediately. Please see the register description for details.

To make the changes persistent the register map must be saved to flash by writing a dedicated value to the **CmdExec** register.

### 4.19 Reset to Factory Default

The Argos 3D-P320 can be reset to factory default settings by deleting the saved register map. This can be done by writing a dedicated value to the register **CmdExec**.

Alternatively, a factory reset is executed via the camera's reset signal. (Please consult the Hardware User Manual for details.) It must be active until the firmware is completely booted and the data stream is present.

### 4.20 Firmware Update

The Argos 3D-P320 is capable of updating its firmware (as well as the boot loader). The update procedure is executed using dedicated TCP/IP command frames over the control interface connection.

Bluetechnix provides the "Downloader" tool within the BltTofSuite for updating the Argos firmware over Ethernet.



#### Note

In order to complete a firmware update, a complete reboot of the camera is required. The camera will NOT reboot automatically.

#### 4.20.1 Firmware Recovery

If a new firmware fails to load for 3 times, the Argos boot loader will recover the old firmware automatically.

This issue can be visibly detected if the color LED flashes orange and yellow for three times consecutively, without flashing green in between. After a firmware recovery, Bit[8] of the **Status** register is set.

The Argos camera also features a firmware load attempt counter, in register **BootStatus**. It is usually 1 (first boot attempt successful). It will lose its value if power is completely removed from the camera.

### 4.21 Logging

The camera automatically saves log messages to a dedicated partition in the internal flash.

Log data may be retrieved using the Secure Shell login (see chapter 3.9) and can be found at `/mnt/logs/messages*` files. Newest log data is contained in file `messages`.



## 4.22 Error Indication

The Argos 3D-P320 indicates detected errors mainly in the **Status** register:

- **Bit 3:** Indicates a temperature measurement error on at least one LIM. The bit is automatically cleared if the error disappears.
- **Bit 4:** Indicates a temperature measurement error on the TIM. The bit is automatically cleared if the error disappears.
- **Bit 5:** Indicates that calibration data are missing, refer to **CalibStatus** and **CalibStatus2**.
- **Bit 8:** There were errors during firmware boot, the previous firmware was discovered. This bit is not set again after a reboot.
- **Bit 9:** Indicates the LIM temperature has exceeded the maximum tolerable value
- **Bit 11:** The status of at least one LIM could not be retrieved, or there is an error condition in one of the LIM status registers **Lim1Status** and **Lim2Status**.
- **Bit 13:** Error retrieving color sensor data (if register **ImageDataFormat** is set to a format containing color data).
- **Bit 14:** Indicates a temperature measurement error on the base board. The bit is automatically cleared if the error disappears.
- **Bit 15:** Indicates a communication error with the TIM, or an error with triggering the TIM. This bit is automatically cleared if the error disappears.



## 5 Register Description

### Note



Some critical registers are password protected. To enable the functionality a specific value must be written to the **CmdEnablePasswd** register in advance to enable the functionality. This should prevent from accidentally executing certain functions.

### 5.1 General registers

Addr (hex)	Register Name	Default Value (hex)	R/W	Description
0001	Mode0	0001	R/W	Bit[0]: 0...Manual Mode, 1...Video Mode Bit[4]: 1...Manual Trigger (self-clearing bit) Bit[6]: 1...Clear status register (self-clearing bit) Bit[11]: 1...3D Snapshot Trigger (self-clearing bit)
0003	Status	0040	R	Bit[2]: 1...Ongoing Calibration Bit[3]: 1...LIM temperature sensor error (Temperature sensors not found, or temporary temperature reading error) Bit[4]: 1...TIM temperature sensor error Bit[5]: 1...Calibration data missing Bit[6]: 1...Factory Regmap was loaded Bit[8]: 1...Previous firmware version was restored Bit[9]: 1...LIM over-temperature Bit[10]: 1...Frame rate or integration time was limited due to PoE constraints Bit[11]: 1...Error condition reported by one of the LIMs, see registers <b>Lim1Status</b> and <b>Lim2Status</b> for details Bit[13]: 1...Color sensor stream error Bit[14]: 1...Base board temperature sensor error Bit[15]: 1...TIM error (I2C communication, triggering)
0004	ImageDataFormat	0000	R/W	Bit[3:10]: 0 ... Distances and Amplitudes 1 ... Distances, Amplitudes, and Confidences 2 ... Distances, Amplitudes and Color 3 ... XYZ Point Cloud 4 ... XYZ Point Cloud and Amplitudes 5 ... XYZ Point Cloud and Color (Overlay) 6 ... Distances and Color 7 ... 4 raw phases (0°,90°,180°,270°) 8 ... 4 raw phases (270°,180°,90°,0°) 9 ... Distances and XYZ Point Cloud 10 ... X Coordinate and Amplitudes 11 ... Test mode 12 ... Distances 13 ... Raw Distances and Amplitudes 21 ... Distances, Amplitudes, Confidences, and Color
0005	IntegrationTime	05DC	R/W	Integration Time [µs] (min: 1, max: 24000)
0006	DeviceType	B320	R	Hardware specific identification



Addr (hex)	Register Name	Default Value (hex)	R/W	Description
0007	DeviceInfo		R	Bit[0-3]: PCB Revision 0...V2.1 1...V2.2 2...V2.3
0008	FirmwareInfo		R	Bit[0-5]: Non Functional Revision Bit[6-10]: Minor Revision Bit[11-15]: Major Revision
0009	ModulationFrequency	07D0	R/W	Modulation frequency index: 0...5 MHz 1...7.5 MHz 2...10 MHz 3...15 MHz 4...20 MHz 5...25 MHz 6...30 MHz or a modulation frequency in multiples of 10kHz (may take a while to apply and no calibration data will be available)
000A	Framerate	0028	R/W	ToF frame rate [Hz]
000B	HardwareConfiguration		R/W	Lens opening angle identifier for ToF sensor
000C	SerialNumberLowWord		R	Lower 16bit of the 32bit Serial Number
000D	SerialNumberHighWord		R	Higher 16bit of the 32bit Serial Number
000E	FrameCounter		R	Frame Counter (increments on every captured frame)
000F	CalibrationCommand	0000	R/W	Bit[0:7]: Cmd code 13...FPPN calibration for the current modulation frequency. Exactly one sequence must be configured in register <b>NofSequ</b> . 16...Clear FPPN calibration data for the current modulation frequency. Always takes modulation frequency of first sequence! 19...Calibrate DistOffset for the current modulation frequency. Exactly one sequence must be configured in register <b>NofSequ</b> .
0010	ConfidenceThresLow	012C	R/W	Amplitude threshold for valid distance data
0011	ConfidenceThresHigh	3A98	R/W	Amplitude threshold for valid distance data
0019	Mode1	0000	R/W	Bit[3]: 0..AEC Off, 1..AEC On
001B	LedboardTemp		R	Temperature of LIMs in 0.01[°C] (FFFF: Sensor not available).
001C	MainboardTemp		R	Temperature of ToF sensor in 0.01[°C] (FFFF: Sensor not available).
0020	RealWorldXcoordinate	0000	R/W	Distance to the calibration target [mm].
0021	CalibStatus	0000	R	Bit[0-7]: Status/error 0...Idle 19...FPPN calibration 20...Erasing flash 21...DistOffset calibration 161...Operation done 246...Wrong image mode (Need distance) or Mode0 setting (Need video mode) 248.. Invalid modulation frequency 255...Generic error



Addr (hex)	Register Name	Default Value (hex)	R/W	Description
				Bit[10]: 1...Error occurred Bit[12]: 1...No FPPN Calibration data in NVM Bit[14]: 1...No Lens Calibration data in NVM
0022	CmdEnablePasswd	0000	R/W	Set a password for critical operations: 0x4877: Register map flash operations (register CmdExec 0x0033) 0x5e6b: Test commands (register TestConfig 0x01c0)
0024	MaxLedTemp	1B58	R/W	Maximum tolerable LIM temperature 0.01[°C]
0026	HorizontalFov	2)	R	Horizontal field of view in 0,01[°]
0027	VerticalFov	2)	R	Vertical field of view in 0,01[°]
002B	TriggerDelay	0000	R/W	Delay between input trigger assertion (either software or hardware) and output trigger assertion (image capturing, trigger output) [ms]
002C	BootStatus	4000	R	Bit[14-15]: Firmware Load Counter. This counter is reset by the firmware. It counts the boot attempts. In Bootloader mode it is used to detect a firmware load problem
002D	TempCompGradientLim		R/W	Factor 'c' of the illumination temperature compensation function: $y \text{ [mm]} = a/100000 * x^3 + b/10000 * x^2 + c/1000 * x$
0030	TempCompGradient2Lim		R/W	Factor 'b' of the illumination temperature compensation function: $y \text{ [mm]} = a/100000 * x^3 + b/10000 * x^2 + c/1000 * x$
0032	TimVersion		R	Version of the firmware on the TIM Bit[0-5]: Non Functional Revision Bit[6-10]: Minor Revision Bit[11-15]: Major Revision
0033	CmdExec	0000	R/W	Initiate an operation: 0xC2AE...Clear RegMap in flash 0x9E20...Read RegMap from flash 0x909A...Read factory RegMap 0xDD9E...Save RegMap in flash  Writing this register must be preceded by writing 0x4877 into register CmdEnablePasswd (0x0022).
0034	CmdExecResult	0000	R	Result code of the operation initiated using CmdExec 1...Success Other...Error
0035	FactoryMacAddr2		R	Hi byte and byte 4 of the MAC address stored in OTP flash
0036	FactoryMacAddr1		R	Byte 3 and 2 of the MAC address stored in OTP flash
0037	FactoryMacAddr0		R	Byte 1 and low byte of the MAC address stored in OTP flash
0038	FactoryYear		R	Production year (stored in OTP flash)
0039	FactoryMonthDay		R	Bit[0-7]: Production day (stored in OTP flash) Bit[8-15]: Production month (stored in OTP flash)
003A	FactoryHourMinute		R	Bit[0-7]: Production hour (stored in OTP flash) Bit[8-15]: Production minute (stored in OTP flash)
003B	FactoryTimezone		R	Production time zone (stored in OTP flash)



Addr (hex)	Register Name	Default Value (hex)	R/W	Description
003C	TempCompGradient3Lim		R/W	Factor 'a' of the temperature compensation function: $y \text{ [mm]} = a/100000 * x^3 + b/10000 * x^2 + c/1000 * x$
003D	BuildYearMonth		R	Firmware Build date/time Bit[14-4]: Year Bit[3-0]: Month
003E	BuildDayHour		R	Firmware Build day/hour Bit[9-5]: Day Bit[4-0]: Hour
003F	BuildMinuteSecond		R	Firmware Build date/time Bit[11-6]: Minute Bit[5-0]: Second
0040	UpTimeLow		R	Lower 16 bit of uptime in [s]
0041	UpTimeHigh		R	Higher 16 bit of uptime in [s]
0042	AcfPlausCheckAmpLimit	0032	R/W	Limit for the ACF plausibility check
0043	TimSerialLow		R	Serial Number of the TIM, low word
0044	TimSerialHigh		R	Serial Number of the TIM, high word
0046	ProcessorStatus		R	Bit[0:7]: ...Temperature of the processor in °C (0xFF: Sensor not available) Bit[8:15]: ...Processor speed in 10-MHz-steps
0047	RgbLedColor	0000	R/W	RGB565 color value of RGB LED
0048	Lim1Status	0000	R	Status word of LIM #1 or external illumination.  Bits[0..4]: Overcurrent on LED segments 0..4 Bits[8..12]: Open load on LED segments 0..4 Bit[14]: Temperature sensor error Bit[15]: Could not read status word (communication failure)
0049	Lim2Status	0000	R	Status word of LIM #2 (Bit description see register <b>Lim1Status</b> )
004A	TempCompGradientTim		R/W	Factor 'c' of the ToF sensor temperature compensation function: $y \text{ [mm]} = a/100000 * x^3 + b/10000 * x^2 + c/1000 * x$
004B	TempCompGradient2Tim		R/W	Factor 'b' of the ToF sensor temperature compensation function: $y \text{ [mm]} = a/100000 * x^3 + b/10000 * x^2 + c/1000 * x$
004C	TempCompGradient3Tim		R/W	Factor 'a' of the ToF sensor temperature compensation function: $y \text{ [mm]} = a/100000 * x^3 + b/10000 * x^2 + c/1000 * x$

Table 34: General registers

Note 2): The content depends on the mounted lens and the calibration data and represents the real viewing angles.

## 5.2 Registers for GPIO Control

Addr (hex)	Register Name	Default Value (hex)	R/W	Description
00D0	IOstate0		R/W	Bit[0]: ... state of IN_0 (only R) Bit[1]: ... state of IN_1 (only R) Bit[8]: ... state of OUT_0 (R/W)



Addr (hex)	Register Name	Default Value (hex)	R/W	Description
				Bit[9]: ... state of OUT_1 (R/W) Bit[10]: ... state of OUT_2 (R/W) Bit[11]: ... state of OUT_3 (R/W)

Table 35: Registers for GPIO Control

### 5.3 Registers for Color Image

Addr (hex)	Register Name	Default Value (hex)	R/W	Description
00E0	ColorStreamParams	0022	R/W	This register configures various options to transmit data from the color sensor.  Bit[1]: Color channel format (for image modes with color sensor data, and for the autonomous UDP data stream) 0 ... RGB565 1 ... JPEG compressed Bit[2]: 1...Enable autonomous UDP data stream Bit[4..6]: Color sensor resolution 0 ... QCIF (176x144) 1 ... QVGA (320x240) 2 ... VGA (640x480) 3 ... NTSC (720x480) 4 ... PAL (720x576) 5 ... XGA (1024x768) 6 ... 720P (1280x720) 7 ... 1080P (1920x1080) Bit[8]: Color sensor frame rate 0 ... 15 fps 1 ... 30 fps
00E1	ColorSensorControl	0003	R/W	Bit[0]: 1 ... AEC/AGC enabled Bit[1]: 1 ... AWB enabled
00E2	ColorSensorExposure	0132	R/W	Exposure register value for color sensor
00E3	ColorSensorGain	001A	R/W	Gain register value for color sensor
00E4	ColorTo3DDelayLowWord		R	Difference between the timestamp of the 3D sensor and the color sensor in $\mu$ s, if current image data format selects ToF and color sensor data (Int32)
00E5	ColorTo3DDelayHighWord		R	Difference between the timestamp of the 3D sensor and the color sensor in $\mu$ s, if current image data format selects ToF and color sensor data (Int32)
00E6	HardwareConfigColor		R/W	Lens opening angle identifier for color sensor

Table 36: 2D Imaging Registers



## 5.4 More General Registers

Addr (hex)	Register Name	Default Value (hex)	R/W	Description
00C1	DistOffset0		R/W	An offset for distance values when operating at modulation frequency with index 0 (5 MHz)
00C2	DistOffset1		R/W	An offset for distance values when operating at modulation frequency with index 1 (7.5 MHz)
00C3	DistOffset2		R/W	An offset for distance values when operating at modulation frequency with index 2 (10 MHz)
00C4	DistOffset3		R/W	An offset for distance values when operating at modulation frequency with index 3 (15 MHz)
00C5	DistOffset4		R/W	An offset for distance values when operating at modulation frequency with index 4 (20 MHz)
00C6	DistOffset5		R/W	An offset for distance values when operating at modulation frequency with index 5 (25 MHz)
00C7	DistOffset6		R/W	An offset for distance values when operating at modulation frequency with index 6 (30 MHz)
0100	UserDefined0	0	R/W	For any purpose
0101	UserDefined1	0	R/W	For any purpose
0102	UserDefined2	0	R/W	For any purpose
0103	UserDefined3	0	R/W	For any purpose
0104	UserDefined4	0	R/W	For any purpose
0105	UserDefined5	0	R/W	For any purpose
0106	UserDefined6	0	R/W	For any purpose
0107	UserDefined7	0	R/W	For any purpose
0108	UserDefined8	0	R/W	For any purpose
0109	UserDefined9	0	R/W	For any purpose
010A	TempCompGradientBaseboard		R/W	Factor 'c' of the ToF base board temperature compensation function: $y [mm] = a/100000 * x^3 + b/10000 * x^2 + c/1000 * x + u$
010B	TempCompGradient2Baseboard		R/W	Factor 'b' of the ToF base board temperature compensation function: $y [mm] = a/100000 * x^3 + b/10000 * x^2 + c/1000 * x + u$
010C	TempCompGradient3Baseboard		R/W	Factor 'a' of the ToF base board temperature compensation function: $y [mm] = a/100000 * x^3 + b/10000 * x^2 + c/1000 * x + u$
010D	BaseboardTemp		R	Temperature of baseboard in 0,01[°C] (FFFF: Sensor not available).
0110	IllPreheatingTime	0	R/W	Sequence 0 illumination preheating 0 ... No pre-heating 100 - 30000 ... Time for illumination pre-heating in microseconds



Addr (hex)	Register Name	Default Value (hex)	R/W	Description
0118	CalibStatus2		R	Bit[0]: 1 ... No wiggling calibration data in NVM Bit[1]: 1 ... No geometric model parameters in NVM Bit[2]: 1 ... No overlay calibration data in NVM
011A	LimTempsInconsistentCounter	0000	R	Counts number of inconsistent temperature measurements on LIMs (difference between 2 LIM temperature sensors exceeds certain limit, e.g., 10°C).
011B	Ready	0000	R	Bit[1]: 1 ... Initial register settings loaded and fully applied
011D	Revision		R	Camera revision

Table 37: More General registers

## 5.5 Registers for Sequencing

Addr (hex)	Register Name	Default Value (hex)	R/W	Description
0120	NofSequ	1	R/W	Number of sequences recorded by the ToF sensor without wait time in between
0121	IntTimeSeq1	05DC	R/W	Integration time to be used for recording sequence 1  NOTE: Sequence 0 integration time is set via register <b>IntegrationTime</b>
0128	ModFreqSeq1	07D0	R/W	Modulation frequency to be used for recording sequence 1  Modulation frequency index: 0.. 5 MHz 1.. 7,5 MHz 2.. 10 MHz 3.. 15 MHz 4.. 20 MHz 5.. 25 MHz 6.. 30 Mhz or a modulation frequency in multiples of 10kHz  NOTE: Sequence 0 modulation frequency is set via register <b>ModulationFrequency</b>

Table 38: Registers for Sequencing

## 5.6 Registers for Illumination Preheating

Addr (hex)	Register Name	Default Value (hex)	R/W	Description
0150	IllPreheatingFreq	0064	R/W	Frequency of the pre-heating modulation signal in multiples of 10kHz



Addr (hex)	Register Name	Default Value (hex)	R/W	Description
0151	IIIPreheatingDutyCycle	0032	R/W	Allowed values: 100...1500 (1MHz...15MHz) Duty cycle of the pre-heating modulation signal in percent
0110	IIIPreheatingTime	0	R/W	Allowed values: 10...90 Sequence 0 illumination preheating 0 ... No pre-heating 100 - 30000 ... Time for illumination pre-heating in microseconds
0152	IIIPreheatingTimeSeq1	0000	R/W	Sequence 1 illumination preheating 0 ... No pre-heating 100 - 30000 ... Time for illumination pre-heating in microseconds

NOTE: Sequence 0 illumination preheating time is set via register **IIIPreheatingTime**

Table 39: Registers for Illumination Pre-heating

## 5.7 Overlay Configuration

Addr (hex)	Register Name	Default Value (hex)	R/W	Description
0170	OverlayConfig	0000	R/W	Bit 0: 1...Mark 3D points without color assignment as "invalid" in point cloud data (X value 0x1)
0171	OverlayVectorLengthThreshold	0014	R/W	Threshold in millimeters for ray-tracing to detect hidden pixel.
0172	OverlayColorInvalidDepth	F800	R/W	If <b>OverlayConfig</b> Bit 0 is 0: RGB565 color value in overlay color channel in case the corresponding depth is invalid, over-, or underexposed
0173	OverlayColorNotCalibrated	001F	R/W	If <b>OverlayConfig</b> Bit 0 is 0: RGB565 color value in overlay color channel in case the corresponding depth is not calibrated
0174	OverlayColorOutside	FFE0	R/W	If <b>OverlayConfig</b> Bit 0 is 0: RGB565 color value in overlay color channel in case the corresponding 3D point is mapped outside the color sensor area
0175	OverlayColorNoMapping	07FF	R/W	If <b>OverlayConfig</b> Bit 0 is 0: RGB565 color value in overlay color channel in case the corresponding 3D point cannot be mapped to the color sensor area
0176	OverlayColorHidden	F81F	R/W	If <b>OverlayConfig</b> Bit 0 is 0: RGB565 color value in overlay color channel in case the corresponding 3D point cannot be seen by the color sensor (Ray Tracing)



Table 40: Registers for Overlay Configuration

## 5.8 Automatic Exposure Control

Addr (hex)	Register Name	Default Value (hex)	R/W	Description
01A9	AecAvgWeight0	4444	R/W	Bit[15-12]: Weight for average, area 1 Bit[11-8]: Weight for average, area 2 Bit[7-4]: Weight for average, area 3 Bit[3-0]: Weight for average, area 4
01AA	AecAvgWeight1	44CC	R/W	Bit[15-12]: Weight for average, area 5 Bit[11-8]: Weight for average, area 6 Bit[7-4]: Weight for average, area 7 Bit[3-0]: Weight for average, area 8
01AB	AecAvgWeight2	C44C	R/W	Bit[15-12]: Weight for average, area 9 Bit[11-8]: Weight for average, area 10 Bit[7-4]: Weight for average, area 11 Bit[3-0]: Weight for average, area 12
01AC	AecAvgWeight3	FC44	R/W	Bit[15-12]: Weight for average, area 13 Bit[11-8]: Weight for average, area 14 Bit[7-4]: Weight for average, area 15 Bit[3-0]: Weight for average, area 16
01AD	AecAvgWeight4	CCC4	R/W	Bit[15-12]: Weight for average, area 17 Bit[11-8]: Weight for average, area 18 Bit[7-4]: Weight for average, area 19 Bit[3-0]: Weight for average, area 20
01AE	AecAvgWeight5	4444	R/W	Bit[15-12]: Weight for average, area 21 Bit[11-8]: Weight for average, area 22 Bit[7-4]: Weight for average, area 23 Bit[3-0]: Weight for average, area 24
01AF	AecAvgWeight6	4000	R/W	Bit[15-12]: Weight for average, area 25
01B0	AecAmpTarget	02BC	R/W	Auto exposure target amplitude value to which the controller is controlling to
01B1	AecTintStepMax	0021	R/W	Auto exposure maximum change of integration time percentage. The relative change of the integration time will be lower than this percentage
01B2	AecTintMax	2710	R/W	Auto exposure maximum integration time the controller calculates
01B3	AecKp	0028	R/W	Proportional part of the auto exposure controller in percent
01B4	AecKi	000F	R/W	Integral part of the auto exposure controller in percent
01B5	AecKd	0000	R/W	Differential part of the auto exposure controller in percent

Table 41: Registers for automatic exposure control

## 5.9 Registers for Test Commands

Addr (hex)	Register Name	Default Value (hex)	R/W	Description
01C0	TestConfig	0000	R/W	Bit[1]: 1... Watchdog Test Bit[2]: 1... Simulate color sensor module failure Bit[3]: 1... Simulate ToF sensor module failure Bit[4]: 1... Manually power off camera with UVLO detector



Addr (hex)	Register Name	Default Value (hex)	R/W	Description
Writing this register must be preceded by writing 0x5E6B into register CmdEnablePasswd (0x0022)				

Table 42: Registers for Test Commands

## 5.10 Registers for Device Update

Addr (hex)	Register Name	Default Value (hex)	R/W	Description
01D1	FileUpdateStatus	0000	R	0...idle 3...out_of_memory 6...file crc error 8...erasing flash 9...flashing 11...erasing failed 12...flashing failed 14...update success 16...header version conflict 18...wrong fw identifier 20...data inconsistent 21...in progress 255...protocol violation
01D9	MaterialNumberLow		R	Material number, low word
01DA	MaterialNumberHigh		R	Material number, high word

Table 43: Registers for device update

## 5.11 Registers for Filter Configuration

Addr (hex)	Register Name	Default Value (hex)	R/W	Description
01E0	ImgProcConfig	28C0	R/W	Bit[0]: 1...enable Median Filter for Distance Image Bit[1]: 1...enable Average Filter for Distance Image Bit[3]: 1...enable Bilateral Filter for Distance Image Bit[4]: 1...enable Sliding Average for Distance Image Bit[6]: 1...enable wiggling compensation for Distance Image Bit[7]: 1...enable FPPN compensation for Distance Image Bit[10]: 1...enable FrameAverage Filter for Distance Image Bit[11]: 1...enable temperature compensation for Distance Image Bit[13]: 1...enable offsets via registers <b>DistOffsetX</b> (0x00C1 onwards) for Distance Image
01E1	FilterMedianConfig	0001	R/W	Bit[0-7]: Nr. of Median Iterations
01E2	FilterAverageConfig	0100	R/W	Bit[0-7]: 2... 2x2 Pixel



Addr (hex)	Register Name	Default Value (hex)	R/W	Description
				Others ... currently not supported, filter gets disabled
01E4	FilterBilateralConfig	13DE	R/W	Bit[0-5]: Sigma R (Width of range kernel) Bit[6-11]: Sigma S (Width of spatial kernel) Bit[12-15]: Nr. of iterations
01E5	FilterSlafConfig	0005	R/W	Bit[0-7]: Window size
01E6	FilterBilateralConfig2	0003	R/W	Bit[0-5]: Square size (=> Window size = square size x square size)
01E7	FilterFrameAverageConfig	0002	R/W	Bit[0-7]: Number of Frames
01E9	ImgProcConfig2	0000	R/W	Bit[0]: 1... enable Median Filter for Amplitude Image Bit[1]: 1... enable Bilateral Filter for Amplitude Image Bit[2]: 1... enable Sliding Average Filter for Amplitude Image Bit[3]: 1... enable FrameAverage Filter for Amplitude Image. Bit 10 of register <b>ImgProcConfig</b> must be set.

Table 44: Register for filter configuration

## 5.12 Registers for Advanced Image Processing

Addr (hex)	Register Name	Default Value (hex)	R/W	Description
01F0	ImgProcAdvanced	0	R/W	Bit[0]: 1... enable Combine Mode (combine several sequences to one)

## 5.13 Registers for Ethernet configuration

Addr (hex)	Register Name	Default Value (hex)	R/W	Description
0240	Eth0Config	0006	R/W	Bit[0]: 1.. Enable DHCP Bit[1]: 1.. Enable UDP streaming Bit[2]: 1.. Ignore CRC for UDP streaming
0241	Eth0Mac2		R/W	Byte 5 (=High byte) and byte 4 of MAC address Writing this register has no immediate effect.
0242	Eth0Mac1		R/W	Byte 3 and byte 2 of MAC address Writing this register has no immediate effect.
0243	Eth0Mac0		R/W	Byte 1 and byte 0 (=Low byte) of MAC address <b>Writing this register will update the network configuration with the new MAC address.</b>
0244	Eth0Ip0	000A	R/W	Low word of IP address Writing this register has no immediate effect (see register 0x0249).
0245	Eth0Ip1	C0A8	R/W	High word of IP address Writing this register has no immediate effect (see register 0x0249).
0246	Eth0Snm0	FF00	R/W	Low word of subnet mask



Addr (hex)	Register Name	Default Value (hex)	R/W	Description
				Writing this register has no immediate effect (see register 0x0249).
0247	Eth0Snm1	FFFF	R/W	High word of subnet mask Writing this register has no immediate effect (see register 0x0249).
0248	Eth0Gateway0	0001	R/W	Low word of gateway Writing this register has no immediate effect (see register 0x0249).
0249	Eth0Gateway1	C0A8	R/W	High word of gateway <b>Writing this register will update the network configuration with new IP address, subnet mask and gateway.</b>
024B	Eth0TcpCtrlPort	2711	R/W	Port for TCP control interface
024C	Eth0UdpStreamIp0	0001	R/W	Low word of IP address for UDP stream Writing this register has no immediate effect.
024D	Eth0UdpStreamIp1	E000	R/W	High word of IP address for UDP stream <b>Writing this register will update the network configuration with the new UDP stream address.</b>
024E	Eth0UdpStreamPort	2712	R/W	Port for UDP streaming
0250	PoEStatus		R	Bit[0..2]: Detected PoE power class 1: PoE (13W limitation) 2: PoE+ (25.5W limitation) 3: PoE++ (no power limitation) 7: VAUX (no power limitation)
0251	PoEOverride	0000	R/W	Bit[0..1]: Override PoE power class 0: Don't override 1: 13W limitation (PoE) 2: 25.5W limitation (PoE+) 3: No limitation (PoE++)  <b>Note: This limit is only checked against if integration time (0x0005) or frame rate (0x000a) is set. No immediate action is taken when this register is written.</b>
0252	Eth0Udp2dStreamIp0	0001	R/W	Low word of destination IP address for 2D video stream Writing this register has no immediate effect.
0253	Eth0Udp2dStreamIp1	E000	R/W	High word of destination IP address for 2D video stream  <b>Writing this register will update the 2D camera stream address.</b>
0254	Eth0Udp2dStreamPort	2714	R/W	UDP port for 2D video stream
0256	Eth0UdpColorStreamIp0	0001	R/W	Low word of destination IP address for Color sensor UDP data stream
0257	Eth0UdpColorStreamIp1	E000	R/W	High word of destination IP address for Color sensor UDP data stream
0258	Eth0UdpColorStreamPort	2716	R/W	UDP port for Color sensor UDP data stream

Table 45: Registers for Ethernet configuration



## 6 Firmware History

### 6.1 Version Information

Firmware Version	Status	Release date	Changes
0.2.2	X-Grade	Jul 2014	
0.3.1	X-Grade	Nov 2014	<ul style="list-style-type: none"> <li>[Bug] Factory reset deletes calibrated distance offsets <sup>1)</sup></li> <li>[Feature Request] Support new image mode: DIST-COLOR <ul style="list-style-type: none"> <li>See register <b>ImageDataFormat</b></li> </ul> </li> <li>[Usability] XYZ Modes: Change X value of underexposed pixels (32767), invalid pixels (1), and overexposed pixels (0), Y = Z = 0!</li> <li>[Feature Missing] Color sensor: Add two more resolutions: QCIF and XGA <ul style="list-style-type: none"> <li>See register <b>ColorStreamParams</b></li> </ul> </li> <li>[Bug] Color sensor: Auto exposure not turned on again after resolution changed</li> <li>[Feature Request] Change installed library from M100API to BltTofApi (EthLib)</li> <li>[Feature Request] Don't lock application to a single core, give control to Linux scheduler</li> <li>[Feature Request] New Image mode 2: DIST-AMP-COLOR (including color sensor raw stream in 3rd channel) <ul style="list-style-type: none"> <li>See register <b>ImageDataFormat</b></li> </ul> </li> <li>[Feature Request] Color sensor: Implement YUV420-over-RTP mode <ul style="list-style-type: none"> <li>See register <b>ColorStreamParams</b></li> </ul> </li> <li>[Feature Request] Read vertical and horizontal FOV register values from lens calibration file, instead of calculating them <ul style="list-style-type: none"> <li>See registers <b>HorizontalFOV</b> and <b>VerticalFOV</b></li> </ul> </li> <li>[Feature Missing] Temperature compensation for ToF sensor required <ul style="list-style-type: none"> <li>See registers <b>TempCompGradientTim</b>, <b>TempCompGradient2Tim</b>, <b>TempCompGradient3Tim</b></li> </ul> </li> <li>[Usability] Change pixel invalidation priority: INVALID, then OVER/UNDEREXPOSED.</li> <li>Image Header was extended due to new image data formats.</li> </ul> <p><sup>1)</sup> Please contact Bluetechnix support for information how to store factory defaults.</p>
0.4.1	X-Grade	Apr 2015	<ul style="list-style-type: none"> <li>[Unintended Behaviour] Change order of applying filters → See chapter 4.3</li> <li>[Feature Request] Implement voltage monitoring with dual-color LED → See chapter 3.7</li> <li>[Feature Request] 3D Snapshot mode for averaged 3D frame → New bit 11 in register <b>Mode0</b></li> <li>[Bug] Sometimes, camera starts without illumination active</li> <li>[Feature Request] Support only LIM &gt;V2.0 modules. Turn off internal LIM modules if external illumination is connected.</li> </ul>



Firmware Version	Status	Release date	Changes
			<ul style="list-style-type: none"> <li>→ New registers <b>Lim1Status</b> and <b>Lim2Status</b></li> <li>• [Stability] Make 2D capturing more fault-tolerant</li> <li>• [Feature Request] Temperature compensation: Change <math>x^3</math> factor to 1/100000</li> <li>→ Changed definitions of registers <b>TempCompGradient3Lim</b>, <b>TempCompGradient3Tim</b>, <b>TempCompGradient3BaseBoard</b></li> <li>• [Feature Request] Show TIM's firmware version in register</li> <li>→ New register <b>TimVersion</b></li> <li>• [Feature Missing] Support RGB LED on EXT-MTK-OV5640 camera module</li> <li>→ New register <b>RgbLedColor</b></li> <li>• [Feature Missing] Support base board temperature sensor</li> <li>→ New field 0x24 in image header, see chapter 3.2.2</li> <li>→ New registers <b>BaseboardTemp</b>, <b>TempCompGradientBaseboard</b>, <b>TempCompGradient2Baseboard</b>, <b>TempCompGradient3Baseboard</b></li> <li>→ New bit 14 in register <b>Status</b> for temp. sensor error</li> </ul>
0.4.2	X-Grade	Apr 2015	<ul style="list-style-type: none"> <li>• [Feature Request] Support LIMs V1.x and V2.x</li> <li>• [Unintended Behaviour] Fix voltage indication LED for PoE power supply</li> </ul>
0.5.0	X-Grade	Jul 2015	<ul style="list-style-type: none"> <li>• Add sequencing support (up to 2 individual ToF sequences processed sequentially)</li> <li>→ See chapters 4.10 (registers), 5.5</li> <li>• Add configurable illumination pre-heating per sequence</li> <li>→ New registers <b>IIIPreheatingTime</b>, <b>IIIPreheatingTimeSeq1</b></li> <li>→ See chapter 4.11</li> <li>• Add JPEG compression for color sensor data</li> <li>→ See register <b>ColorStreamParams</b></li> <li>→ See chapter 3.2.2 for updated image header</li> <li>• Support <i>Pxxx Linux Development Package</i></li> <li>• Fix calculation of horizontal and vertical FOV values</li> <li>→ Registers <b>HorizontalFOV</b> and <b>VerticalFOV</b></li> <li>• Improve error reporting for LIMs</li> <li>→ Bits 3 and 11 in <b>Status</b> register</li> <li>→ <b>Lim1Status</b> and <b>Lim2Status</b> registers</li> <li>• Add error reporting for TIM</li> <li>→ Bit 15 in <b>Status</b> register</li> <li>• Fix incorrect modulation frequency value in image header</li> <li>• Add image data format #13 with raw distance values and amplitudes</li> <li>→ Register <b>ImageDataFormat</b></li> <li>→ Chapter 4.7.12</li> <li>• Add filter options for Amplitude image</li> <li>→ Register <b>ImgProcConfig2</b></li> <li>→ Chapter 4.3</li> <li>• Fix partly incorrect application of the FPPN compensation to distance data</li> </ul>
0.6.0	X-Grade	Aug 2015	<ul style="list-style-type: none"> <li>• Extend file updates for (proprietary) calibration files</li> <li>→ Chapter 3.1.5</li> <li>• Support read of (proprietary) calibration files</li> <li>→ Chapter 3.1.6</li> </ul>



Firmware Version	Status	Release date	Changes
			<ul style="list-style-type: none"> <li>Store a 32-bit material number in OTP memory → Chapter 5.10</li> <li>Use frame counter from TIM instead of generating it in firmware</li> <li>Fix problem with (re)enabling JPEG encoding</li> <li>Change default color sensor settings to JPEG enabled and VGA resolution</li> <li>Add some test commands → Chapter 5.9</li> <li>Improve overall image processing/compensation performance by means of multi-threading</li> <li>Add internal monitoring of the TIM and a restart procedure in case of a detected failure</li> <li>Add an amplitude-based distance correction to compensate for undesired change in distance in dependence of the amplitude → Chapters 5.12</li> <li>Add register 0x0007 which publishes PCB revision of the camera</li> <li>Fix problem with reading the temperature from the TIM</li> </ul>
0.7.0	X-Grade	Sep 2015	<ul style="list-style-type: none"> <li>Add an independent color sensor data stream over Bluetechnix UDP data protocol → Chapters 4.7.15, 4.16.1, 5.3, 5.13</li> <li>Add a confidence channel and new image data formats → Chapters 4.7.13, 4.7.14, 5.1</li> <li>Add a combine function, which combines frames from 2 sequences (with probably different integration times and/or modulation frequencies) into 1 frame with higher confidence and more accurate distances → Chapters 4.4.3, 5.12</li> <li>Add plausibility check for TIM and base board temperature sensor values</li> <li>Don't report an error on register map deletion, if no register map is currently stored</li> <li>Change control of color sensor framerate: Via <b>ColorStreamParams</b> register bit 8 only – no more influence of ToF sensor framerate on color sensor framerate</li> </ul>
0.7.1	X-Grade	Sep 2015	<ul style="list-style-type: none"> <li>Support concurrent operation of UDP Color Sensor Stream and image data formats containing color sensor data</li> </ul>
0.8.0	X-Grade	Sep 2015	<ul style="list-style-type: none"> <li>Add register 0x011B "Ready" → Chapters 5.4, 4.16.2</li> <li>Improve initial initialization of the camera, especially if booted in manual trigger mode → Chapter 4.16.2</li> <li>Improve Combine Sequences feature</li> </ul>
0.9.0	X-Grade	Oct 2015	<ul style="list-style-type: none"> <li>New firmware for TIM</li> <li>Set sequence number of a combined (HDR) frame to 0 always</li> </ul>
0.9.1	X-Grade	Oct 2015	<ul style="list-style-type: none"> <li>Bugfix: Ensure that two snapshots triggered at short intervals cause no errors.</li> </ul>
0.10.0	X-Grade	Nov 2015	<ul style="list-style-type: none"> <li>Add color sensor control registers <ul style="list-style-type: none"> <li>Registers <b>ColorSensorControl</b>, <b>ColorSensorExposure</b>, <b>ColorSensorGain</b></li> <li>Chapter 4.16.2</li> </ul> </li> </ul>



Firmware Version	Status	Release date	Changes
			<ul style="list-style-type: none"> <li>Change <b>DeviceInfo</b> register content</li> <li>Add register <b>Revision</b> to store overall camera revision</li> <li>Switch off RGB LED by default (near color sensor) <ul style="list-style-type: none"> <li>Register <b>RgbLedColor</b></li> </ul> </li> <li>Rework Status Indicator LED <ul style="list-style-type: none"> <li>Chapter 3.7</li> </ul> </li> </ul>
0.12.0	X-Grade	Feb 2015	<ul style="list-style-type: none"> <li>New firmware for TIM</li> <li>Rework wiggling correction (wiggling correction file is needed)</li> <li>Add 2x2 average filter</li> </ul>
0.14.0	X-Grade	Apr 2016	<ul style="list-style-type: none"> <li>Improve amplitude smoothness in combine mode</li> <li>Add support for camera discovery via UDP <ul style="list-style-type: none"> <li>→ See Chapter 3.3</li> </ul> </li> <li>Remove support for color sensor RTP stream <ul style="list-style-type: none"> <li>→ Use UDP stream instead (Chapter 4.16.1)</li> <li>→ Updated chapters 4.16, 5.3</li> </ul> </li> <li>New register <b>HardwareConfigColor</b> <ul style="list-style-type: none"> <li>→ Chapter 5.3</li> </ul> </li> <li>Add support for color overlay of XYZ data <ul style="list-style-type: none"> <li>→ Chapters 4.6, 4.7.8, 5.1, 5.3, 5.7</li> </ul> </li> <li>Add support for calibration files: "Geometric Model Parameters" and "Overlay Calibration" <ul style="list-style-type: none"> <li>→ Chapters 3.1.5, 4.6</li> <li>→ New register <b>CalibStatus2</b></li> </ul> </li> <li>Refuse image data formats with XYZ point cloud on missing lens calibration data <ul style="list-style-type: none"> <li>→ Chapter 4.7</li> </ul> </li> <li>Change XYZ point cloud coordinate system from sensor-intrinsic to camera (extrinsic) <ul style="list-style-type: none"> <li>→ Chapter 4.7</li> </ul> </li> <li>Change status indicator LED meaning <ul style="list-style-type: none"> <li>→ Chapter 3.7</li> </ul> </li> </ul>
0.14.1	X-Grade	Apr 2016	<ul style="list-style-type: none"> <li>Fixed anomaly "If DHCP is enabled, the camera returns a wrong device IP address on a discovery request."</li> </ul>

Table 46: Overview Argos 3D-P320 firmware changes

### Note



Please refer to our support site for additional information about product changes.

## 6.2 Anomalies

Applies to	Date	Description
0.2.2	2014 11 13	Factory default reset resets DistOffsetX registers to zero. Offset calibration must be executed for each modulation frequency.
0.3.1	2014 11 13	If your Argos 3D-P320 was delivered with firmware version 0.2.2 originally, factory default reset resets DistOffsetX registers to zero. Please contact Bluetechnix support for instructions how to configure factory default settings.
<= 0.3.1	2015 04 20	Illumination not turned on after boot in rare cases
0.4.2	2015 07 08	FPPN calibration data is applied partly incorrect on distance data



Applies to	Date	Description
0.5.0	2015 08 27	Color sensor stream problem may occur on changing parameters
<= 0.5.0	2015 08 27	TIM temperature readout problem (Values in register and header freeze)
0.9.0	2015 10 13	If the time between two snapshots is too short, the camera switches to manual trigger mode without finishing the snapshot
0.14.0	2016 04 20	If DHCP is enabled, the camera returns a wrong device IP address on a discovery request.

Table 47: Firmware anomalies



## 7 Software

### 7.1 BltTofApi

SDK for ToF products: Bluetechnix 'Time of Flight' API

In order to create a common interface for our products we define the interfaces between a ToF device and an application. The main part of this model is the *BltTofApi* which is written in C for platform independency.

The library which provides this API for Ethernet-based devices as the Argos 3D-P320 is the *BtaEthLib* (*BltTofApi* Ethernet Library).

Please visit our support Wiki to get information and to download the SDK.

#### **Bluetechnix 'Time of Flight' API**

 <https://support.bluetechnix.at/wiki/> (Section Software)

### 7.2 MATLAB SDK

MATLAB SDK for ToF products: BltTofApi Matlab SDK

The MATLAB SDK is able to access the *BltTofApi* interface and will therefore be compatible with any device with an existing library implementing the *BltTofApi*.

#### **Bluetechnix 'Time of Flight' API Matlab SDK**

 <https://support.bluetechnix.at/wiki/> (Section Software)

### 7.3 BltTofSuite

For the first evaluation of the camera and to evaluate different settings and configurations a .NET demo application for Microsoft Windows is provided: *BltTofSuite*. The demo application can be downloaded from our support web site.

#### **Software and documentation**

 <https://support.bluetechnix.at/index.html>



## 8 Support

### 8.1 General Support

General support for products can be found at Bluetechnix' support site

#### Support Link

 <https://support.bluetechnix.at/index.html>

### 8.2 Software Downloads

Camera support packages are available for registered customers only. Please contact Bluetechnix support if you do not yet have an account.

#### Software Download Portal

 <https://support.bluetechnix.at/software/>

### 8.3 Related Products

- TIM<sup>uP</sup>-19kS3-Spartan 6
- LIM<sup>U</sup>-LED-850

### 8.4 Camera Development Package

The camera offers the possibility to bring your own application onto the Argos 3D-P320.

The Argos 3D-P320 is based on an embedded ARM Linux system based on the i.MX6 Quad-core processor from Freescale Inc.

Please contact Bluetechnix support for more information.



## 9 Document Revision History

Version	Date	Document Revision
1	2014 08 01	Initial version of the document
2	2014 11 13	<ul style="list-style-type: none"> <li>Added firmware changes from 0.2.2 to 0.3.1 firmware version (Chapter 6.1)</li> <li>Updated register description (Chapters 5.1, 5.2)</li> <li>Added data format description for modes with RGB565 channel (Chapters 0 and 4.7.3)</li> <li>Updated pixel invalidation description (Chapter 4.4)</li> <li>Updated manual trigger description (Chapter 3.4)</li> <li>Added offset calibration procedure (Chapter 4.10)</li> </ul>
3	2015 04 20	<ul style="list-style-type: none"> <li>Added firmware changes from 0.3.1 to 0.4.1 firmware version (Chapter 6.1)</li> <li>- Updated chapter 3.2.2 "Frame Header"</li> <li>- Updated chapter 3.5 "External Illumination Interface"</li> <li>- Added chapter 3.7 "Status Indicator LED"</li> <li>- Updated chapter 4.3 "ToF Image Filters"</li> <li>- Added chapter 4.4.2 "Temperature compensation"</li> <li>- Added chapter 4.14.3 "ToF Snapshot Function"</li> <li>- Updated register descriptions (Chapters 5.1, 5.2)</li> </ul>
4	2015 04 27	Added firmware changes from 0.4.1 to 0.4.2 firmware version (Chapter 6.1)
5	2015 07 08	<ul style="list-style-type: none"> <li>- Added a note on BltToFApi to chapter 3</li> <li>- Updated image header (Sequencing, JPEG color mode) in chapter 3.2.2</li> <li>- Updated chapters 4.2 and 4.3 (Amplitude filters)</li> <li>- Updated chapters 0, 4.7.3, and 4.16 (JPEG format for color data)</li> <li>- Added chapters 4.7.12, 4.10, 4.11, 4.22, 5.5, 5.6</li> <li>- Updated chapter 4.13 with a comment on sequencing</li> <li>- Updated registers 0x0003, 0x0004, and 0x000F in chapter 5.1</li> <li>- Updated register 0x00E0 in chapter 5.3</li> <li>- Added new register 0x0110 to chapter 5.4</li> <li>- Updated register 0x01E0 description in chapter 5.11</li> <li>- Added register 0x01E9 to chapter 5.11</li> <li>- Added firmware changes from 0.4.2 to 0.5.0 version (Chapter 6.1)</li> <li>- Added anomaly to chapter 6.2</li> <li>- Use the following terms consistently throughout document: "Distance", "Color"/"Color sensor", "RTP stream", "Frame".</li> <li>- Update chapters 7 and 8.</li> <li>- Improved index.</li> </ul>
6	2015 08 27	<ul style="list-style-type: none"> <li>- Updated chapter 6.1 (Firmware changes in v0.6.0 firmware)</li> <li>- Updated chapter 3.1.5 (New flash update file types)</li> <li>- Added chapter 3.1.6 (New read-from-flash command)</li> <li>- Updated chapter 5.10 (New registers)</li> <li>- Updated chapter 5.3 (Default value)</li> <li>- Updated chapter 5.9 (New test commands)</li> <li>- Updated chapter 5.1 (New register 0x7)</li> <li>- Updated chapter 6.2</li> </ul>
7	2015 09 09	<ul style="list-style-type: none"> <li>- Updated chapter 6.1 (Firmware changes in v0.7.0 firmware)</li> <li>- Added register description 0x256-0x258 to chapter 5.13</li> <li>- Renamed register 0xE0 and updated register description (chapter 5.3)</li> <li>- Added chapter 4.16.1 (UDP color sensor stream)</li> <li>- Updated register 0x4 description in chapter 5.1</li> <li>- Updated register 0x1F0 description in chapter 5.12 (Combine mode)</li> <li>- Added chapter 4.4.3 (Combine mode)</li> <li>- Added chapters 4.7.13, 4.7.14, 4.7.15 (new camera data formats)</li> <li>- Updated Figure 4-1</li> </ul>
8	2015 09 16	- Updated chapters 3.4, 4.9, 4.16, 4.16.1, 6.1



Version	Date	Document Revision
9	2015 09 23	- Updated description of registers 0x1EB and 0x1ED in chapter 5.11
10	2015 09 30	- Added firmware V0.8.0 description to chapter 6.1 - Updated chapter 5.4 (New register) - Updated chapter 4.16.2
11	2015 11 05	- Updated chapter 4.7.13 - Added register descriptions to chapter 5.12 - Added firmware V0.9.0 description to chapter 6.1
12	2015 11 05	- Updated chapter 6.1 for new firmware V0.9.1 - Added anomaly to chapter 6.2
13	2015 11 05	- Updated chapter 3.7 - Added chapter 4.16.2 - Updated <b>DeviceInfo</b> and <b>RgbLedColor</b> in chapter 5.1 - Added register descriptions to chapter 5.3 - Added <b>Revision</b> description to chapter 5.4 - Updated chapter 6.1
14	2016 02 02	- Updated chapter 3.1.5 - Updated chapter 4.2 - Updated chapter 4.3 - Updated chapter 4.6 - Updated chapter 5
15	20160418	- Updated chapter 3.1.2 (Control Interface Result Codes) - Added chapter 3.3 (Device discovery) - Updated chapter 3.7 (Status Indicator LED) - Updated chapter 4.4.3 (Combine mode) - Updated chapter 4.5 (Camera coordinate system) - Added chapters 4.6 and 4.7.8 (Overlay) - Updated chapter 4.16 (RTP support removal) - Updated chapter 5.1 (Overlay) - Updated chapter 5.3 (RTP support removal) - Updated chapter 5.4 (Overlay) - Added chapter 5.7 (Overlay) - Added new firmware version to chapter 6.1
16	20160420	- Updated chapter 6.2 (Anomalies) - Added new firmware version to chapter 6.1

Table 48: Revision history



## A Index

### A

Anomalies .....	65
Automatic Exposure Control .....	44, 58

### B

BltTofApi .....	32, 67
<u>BltTofApi Matlab SDK</u> .....	67
BltTofSuite .....	32, 48, 67
<u>BtaEthLib</u> .....	67

### C

Color Overlay .....	32
Color Sensor .....	46, 54
Auto Exposure/Auto Gain.....	47
Control .....	47
Resolutions and frame rates .....	46
UDP Stream .....	47
White Balance .....	47
Combine mode .....	31
Control Interface .....	9
Coordinate System .....	31

### D

Data Formats .....	33
Data Interface.....	19
Debug UART .....	25
Discovery .....	22
Distance Offset Calibration .....	44
Document Revision History.....	69

### E

Error Indication.....	49
Ethernet Settings.....	47, 60

### F

Factory Default.....	48
Filter .....	28
Bilateral .....	29
Distance Pixel Invalidation .....	30

Frame Average .....	29
Median .....	29
Registers .....	59
Sliding Average .....	29
Firmware Recovery .....	48
Firmware Update.....	48, 59
<b>Firmware Version</b> .....	8, 51
Frame header .....	20
Frame rate .....	42

### G

GPIOs.....	24, 53
------------	--------

### H

Header	
Frame .....	20
UDP Streaming.....	20
High Dynamic Range (HDR) .....	31

### I

Image Filters.....	28
Image Processing Flow .....	27
Integration Time .....	42

### L

Logging .....	48
---------------	----

### M

Manual Trigger .....	24, 45
<u>Matlab</u> .....	67
Modulation Frequency .....	42

### N

Network Settings.....	47, 60
-----------------------	--------

### O

Over Temperature Protection.....	46
----------------------------------	----



Overlay .....	32, 57
---------------	--------

---

## **P**

Pixel orientation.....	31
Power over Ethernet.....	24
Pre-heating.....	43, 56

---

## **R**

Register Map	
All Registers .....	50
Delete .....	48
Save .....	47

---

## **S**

Sequencing .....	43, 56
Serial terminal .....	26
Snapshot Function.....	45, 69
Software .....	67

SSH .....	25
Support .....	68

---

## **T**

Temperature compensation .....	30
Test	
Commands.....	58
Image mode .....	40
Time Stamp	
Frame Header.....	21

---

## **U**

UDP data format .....	19
UDP Streaming header.....	20

---

## **V**

Version History .....	62
-----------------------	----



## B List of Figures and Tables

### Figures

Figure 3-1: UDP streaming data format .....	19
Figure 4-1: Image processing flow .....	28
Figure 4-2: Argos 3D-P320 Default Coordinate System .....	31
Figure 4-3: Data stream of Distance and Amplitude data .....	35
Figure 4-4: Data stream of Distance, Amplitude, RGB565 Color data .....	36
Figure 4-5: Data stream of distance and RGB565 data .....	37
Figure 4-6: Data stream of XYZ Point Cloud .....	38
Figure 4-7: Data stream of XYZ Point Cloud and Amplitude .....	39
Figure 8: Data stream of Distances, Amplitudes, and Confidences .....	41
Figure 4-9: AEC weighing areas .....	45

### Tables

Table 1: Supported command frames .....	9
Table 2: Register read command frame .....	10
Table 3: Register read response frame .....	11
Table 4: Register read flag description .....	11
Table 5: Result codes .....	11
Table 6: Register write command frame .....	12
Table 7: Register write response frame .....	13
Table 8: Register write flag description .....	13
Table 9: Reset command frame .....	13
Table 10: Reset response frame .....	14
Table 11: Reset flag description .....	14
Table 12: Flash update command frame .....	15
Table 13: Flash update response frame .....	16
Table 14: Flash update subcommand description .....	16
Table 15: Flash update flag description .....	16
Table 16: Flash update command frame .....	17
Table 17: Flash update response frame .....	17
Table 18: Flash update subcommand description .....	17
Table 19: Flash update flag description .....	17
Table 20: Alive command frame .....	18
Table 21: Alive response frame .....	18
Table 22: Alive flag description .....	19
Table 23: UDP packet header .....	20
Table 24: UDP packet header flag description .....	20
Table 25: Frame header .....	22
Table 26: Discovery packet specification .....	23
Table 27: Discovery response packet specification .....	24
Table 28: Supported power supplies .....	25
Table 29: Default login credentials .....	25
Table 30: Debug UART settings .....	26
Table 31: RGB565 format .....	34
Table 32: Pre-defined modulation frequencies .....	42
Table 33: Color sensor resolution and frame rate options, plus opening angles .....	46
Table 34: General registers .....	53
Table 35: Registers for GPIO Control .....	54
Table 36: 2D Imaging Registers .....	54



Table 37: More General registers .....	56
Table 38: Registers for Sequencing .....	56
Table 39: Registers for Illumination Pre-heating .....	57
Table 40: Registers for Overlay Configuration .....	58
Table 41: Registers for automatic exposure control .....	58
Table 42: Registers for Test Commands.....	59
Table 43: Registers for device update .....	59
Table 44: Register for filter configuration .....	60
Table 45: Registers for Ethernet configuration.....	61
Table 46: Overview Argos 3D-P320 firmware changes .....	65
Table 47: Firmware anomalies.....	66
Table 48: Revision history .....	70